


# Air Live VoIP-422

## Hotline Test Report

Model	VoIP-422
Product Standard	FXS *2 FXO *2 Ethernet *1 Power * 1
Default Setting	Default IP : 192.168.0.1 ID : eitg Password : 123
Begin to test	2007-06-25
Test is over	2007-06-28
Test writer	Steven

## Topology map

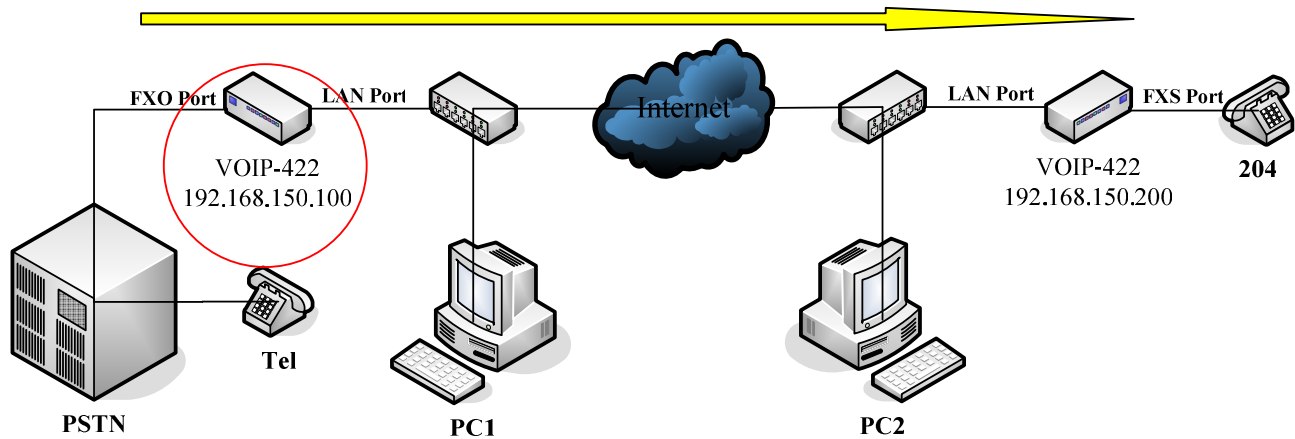

### Step1: Setting device IP address

http://192.168.0.1/setsys0.htm - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites

Address http://192.168.0.1/setsys0.htm Go Links

### Set System Config. Menu

- ITG IP Settings
- H.323 Parameter Settings
- Channel Parameter Settings
- Voice Coder Selection
- DHCP Settings
- PPPoE Settings
- Dynamic DNS Settings

[Help](#)

[Back To Main Menu](#)

### IP Address Settings

Setting gateway IP address

- IP Address: 192.168.150.100
- Subnet Mask: 255.255.255.0
- Default IP Gateway Address: 192.168.150.110  
(If a Default IP Gateway is not desired, please enter 0.0.0.0)

Save The Changes Clear The Changes

IP Address Settings Are:

- IP Address: 192.168.150.100
- Subnet Mask: 255.255.255.0
- Default Gateway IP Address: 192.168.150.110

**Cautions:**  
You will have to reboot the ITG system before the changes become active.  
Invalid settings may cause the system malfunctioned, please make sure your changes before [REBOOT!](#)

Done Internet

## Steps2: Setting dial-plan number

http://192.168.150.100/dialplan0.htm - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address http://192.168.150.100/dialplan0.htm

Phone/Hunt Group/Dest. Setting Menu

Add Telephone Numbers

• Telephone Number 0: 200

• Hunt Group ID: 20

• Min. Digits: 3

• Max. Digits: 6

• Strip Length: 3

• Append Prefix: None

More Entries for The Same Hunt Group

Complete Clear All Changes

Back To Dial-Plan Menu

Back To Main Menu

## Step3: Setting hunt group number

http://192.168.150.100/dialplan0.htm - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address http://192.168.150.100/dialplan0.htm

Phone/Hunt Group/Dest. Setting Menu

Add Hunt Group IDs

• Hunt Group ID: 20

• Destination ID 0: 20

More Destinations for The Same Hunt Group

Complete Clear All Changes

Back To Dial-Plan Menu

Back To Main Menu

#### Step4: Setting remote destination number

http://192.168.150.100/dialplan0.htm - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address http://192.168.150.100/dialplan0.htm Go Links >>

**Phone/Hunt Group/Dest. Setting Menu**

Add Remote\_Destination\_IP Select

Number(s)/IDs

[Back To Dial-Plan Menu](#)  
[Back To Main Menu](#)

**Add Remote Destination ID**

- Destination ID: 20
- IP Address: 192.168.150.200 or
- Host Name:
- Port: 1720
- Company/Location:

Note: if both IP Address and Host Name are defined, only IP Address will be recognized.

Complete Clear All Changes

Done Internet

#### Steps5: Save all configuration into flash

http://192.168.150.100/dialplan0.htm - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address http://192.168.150.100/dialplan0.htm Go Links >>

**Dial-Plan Menu**

- [Phone/Hunt Group/Destination Settings](#)
- [Common Parameter Settings](#)
- [Clear All Dial Plan Settings](#)
- [Restore All Dial Plan Settings](#)
- [Store Settings To Flash](#)

[Help](#)  
[Back To Main Menu](#)

**Store Dial Plan Settings To Flash Memory**

Ready to store Dial Plan settings to Flash Memory.  
Are you sure?


YES

**Store All Dial Plan Settings To Flash Result:**

All Dial Plan Settings Stored!

Done Internet

Steps6: Open DOS command windows and run telnet function (telnet 192.168.150.100),  
Key in the orders of hotline configurations.

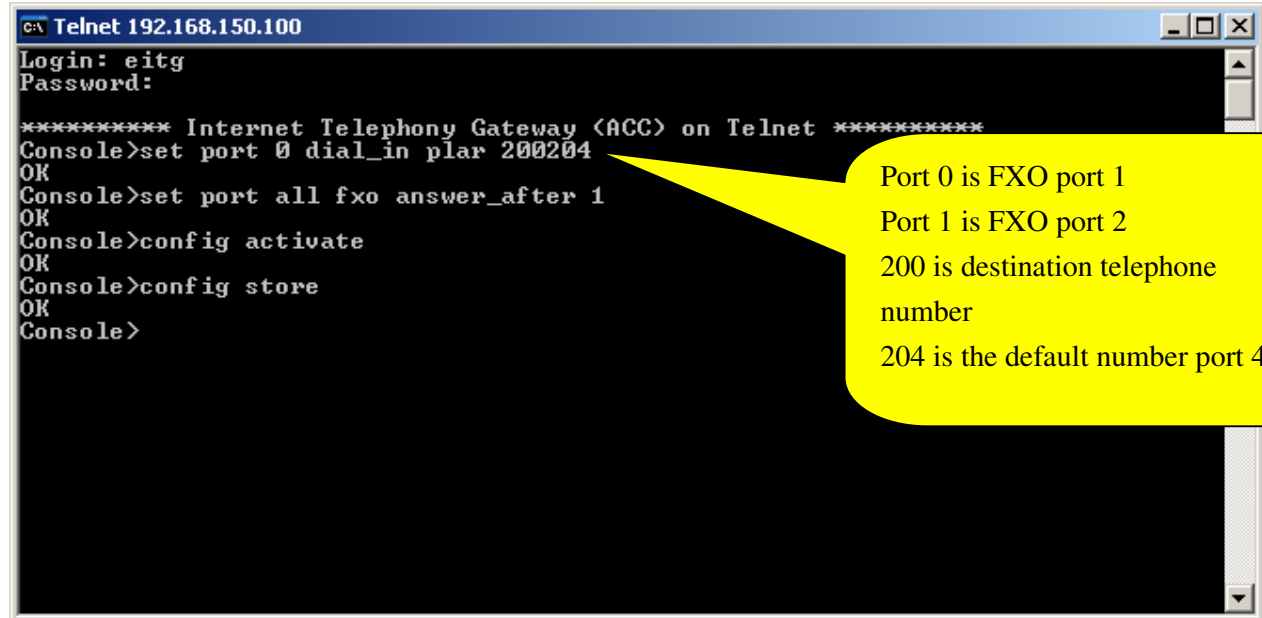

```
G:\ Telnet 192.168.150.100
Login: eitg
Password:

***** Internet Telephony Gateway (ACC) on Telnet *****
Console>set port 0 dial_in plar 200204
OK
Console>set port all fxo answer_after 1
OK
Console>config activate
OK
Console>config store
OK
Console>
```

Port 0 is FXO port 1  
Port 1 is FXO port 2  
200 is destination telephone number  
204 is the default number port 4

PS: if you also want to set 2-way hotline, it only needs to set the same steps but different ip address and phone number.