


How to Trigger the Lens Move remotely (for OD-600HD)

Via the CGI command, user can trigger some event on the IP camera remotely. What's more, combine with two or more IP cameras; user can put chain reaction in their surveillance system. In this guide, we will show you how to trigger OD-600HD's PT preset point via CGI command, and hence capture the anticipated behavior of the intruder.



1.) Set the Preset Point on OD-600HD:

Move the lens of OD-600HD to the desired position and add this position as the first point.

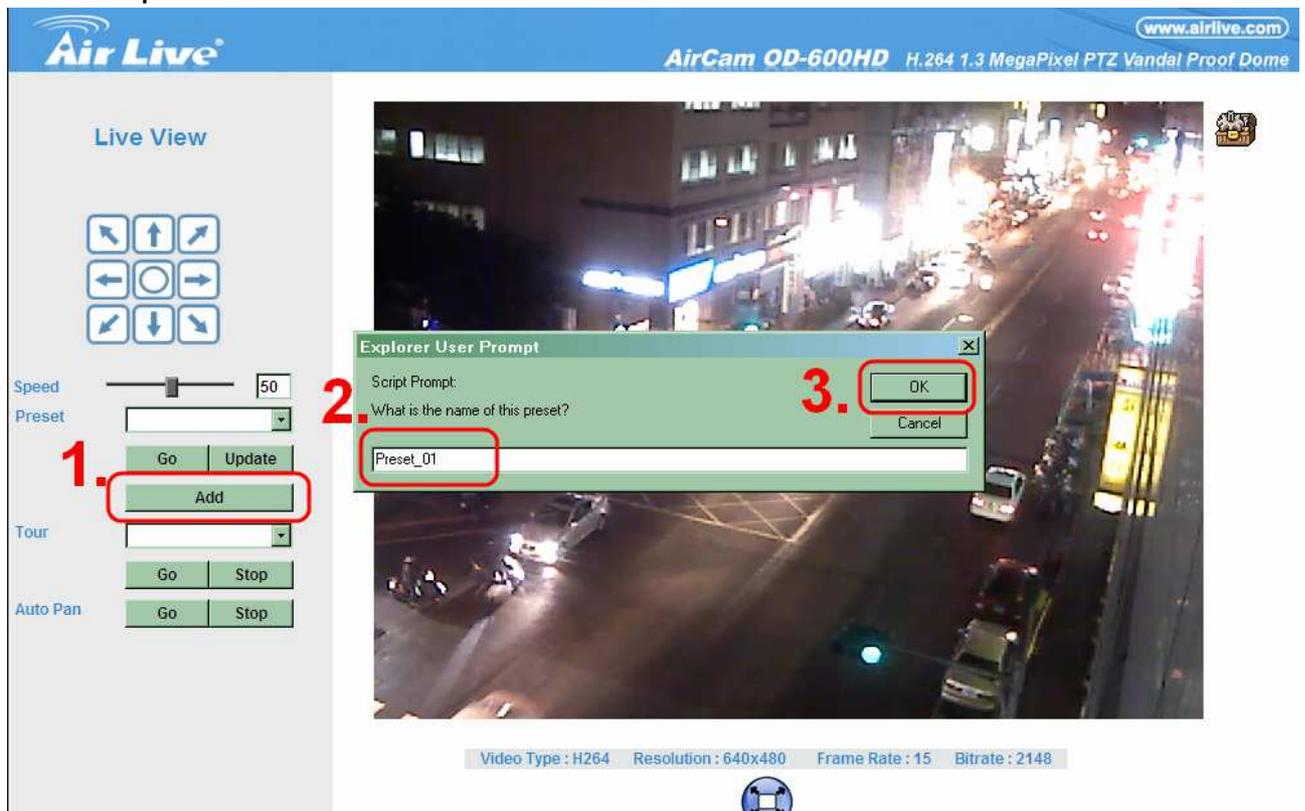

1.

2.

3.

Speed: 50

Preset: [Dropdown]

Go Update

Add

Tour: [Dropdown]

Go Stop

Auto Pan: Go Stop

Explorer User Prompt

Script Prompt:

What is the name of this preset?

Preset_01


OK

Cancel

Video Type : H264 Resolution : 640x480 Frame Rate : 15 Bitrate : 2148

2.) Define the Motion Detection Area on the OD-325HD

Then access the OD-325HD's web and go to "Setting→Motion Detection" for setting the Motion Detection function.

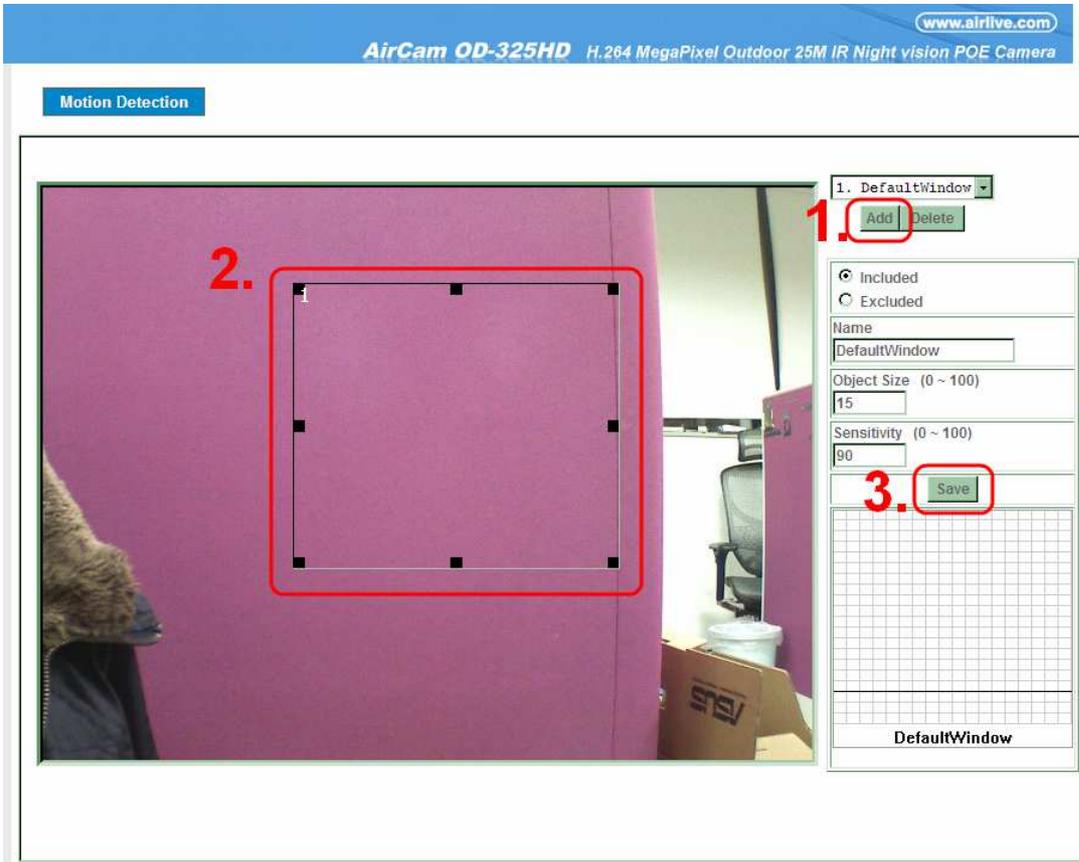

3.) Define the HTTP Server on the OD-325HD

3.1.) Open the Event Server page and click on the HTTP Server tab.

3.2.) Named the record and fill in the URL or IP address of OD-600HD in the URL box.

3.3.) If you have enable authentication function on OD-600HD, please fill in the user name and password also.

FTP Server TCP Server **HTTP Server** SAMBA Server

Name	HTTP Server	Proxy Address
OD-600HD	http://192.168.0.12	

1. (< 22 Digits)

2. (< 129 Digits)

3. (< 22 Digits)

(< 22 Digits)

Proxy Address (< 129 Digits)

Proxy Login Name (< 22 Digits)

Proxy Login Password (< 22 Digits)

Proxy Port (1 ~ 65535)

4.

4.) Configure the Event Schedule on OD-325HD

- 4.1.) Open the Event Schedule page and click on the Setting tab.
- 4.2.) Name the record as usual and check the Motion Area in the “Trigger by” field.
- 4.3.) Check the “Send HTTP” as Action.
- 4.3.) And fill in below string right after the address of OD-600HD:

/com/ptz.cgi?gotoserverpresetno=1

The “gotoserverpresetno” represent the preset point you wish the OD-600HD to move, it can be other preset point you set on OD-600HD

Name	Enable	Type	Weekday	Start	Duration	Trigger by Prefix	Action
Auto_PT	yes	Event	1111111	0:0	24:0	x,	HTTP

1. Name:

Enable: Yes No

Type: Event Trigger Schedule Trigger, Interval (Seconds)

Enable Time: Sun Mon Tue Wed Thu Fri Sat
 Start from : , Duration : ((max 168:00 hours))

Trigger by: Sensor Motion Area **2.**

Record File Prefix: (0 ~ 20 Digits)

Action: Go Preset Tour
 Voice Alert, Duration (0~86400 Seconds)
 Alarm Out, Duration (0~86400 Seconds)
 Send FTP
 Send TCP
 Send HTTP **3.**
 Customer parameters **4.**
 Message
 Send E-Mail
 Send Samba
 ICR (0~86400 Seconds)

5.) After configuring this, once the motion is detected by the OD-325HD, the OD-600HD will move its lens to the desired position immediately.