



FE-5010D

5MP Fisheye Outdoor IP67 PoE
Camera

User's Manual



www.airlive.com



Copyright & Disclaimer

No part of this publication may be reproduced in any form or by any means, whether electronic, mechanical, photocopying, or recording without the written consent of OvisLink Corp.

OvisLink Corp. has made the best effort to ensure the accuracy of the information in this user's guide. However, we are not liable for the inaccuracies or errors in this guide. Please use with caution. All information is subject to change without notice

This product contains some codes from GPL. In compliance with GPL agreement, AirLive will publish the GPL codes on our website. Please go to www.airlive.com and go to the "Support->GPL" menu to download source code.

All Trademarks are properties of their respective holders.

FCC Statement

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the A user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

WEEE Marking Warning:

The crossed out wheeled bin indicates the product must not be disposed together with household waste. For the sake of the environment, the product should only be given to entities involved in the reception of waste electronic and electrical equipment. The lists of entities entitled to receive used equipment can be found on the websites of municipalities. Some components of devices such as external wiring, circuit boards and liquid crystal displays have a negative impact on the environment.



© 2009 OvisLink Corporation, All Rights Reserved

Table of Contents

1. Overview	1
1.1 Introduction	1
1.2 Features	2
1.3 Product Specification	2
1.4 System Requirement	5
2. Package Contents and Installation.....	6
2.1 Package Content	6
2.2 Connections	6
2.3 Install the Camera in LAN	10
2.4 Connect to IP Camera	11
3. Using IP Camera via Web Browser.....	14
3.1 Windows Web Browser	14
4. Operating the Network Camera	15
4.1 Live View	15
4.2 Configuration	19
5. Configuration	20
5.1 Network	21
5.2 Video	26
5.3 Audio	35
5.4 Event	36
5.5 Storage	45
5.6 System	47
6. Operating IP Camera via iOS/Android Device	54
6.1 Using IP Camera via iOS/Android Device	54

1

Overview



This user's manual explains how to operate this camera. Users should read this manual completely and carefully in advance.

1.1 Introduction

AirLive FE-501OD is a Fish-Eye Panorama Network Dome Camera featured with 5Mega Pixel resolution respectively and superior H.264-AVC performance and rich functions. FE-501OD includes a fish-eye lens for 360° panoramic wide angle view without blind spot. It is very suitable to view a wide area with single camera such as hallway, store, and office without the need to install multiple cameras.

The hardware base panorama video processing ability provides user flexible video layout including Panorama, Original View, Double Broad View, Triple View and Quad View. The e-PTZ function, including preset point without moving parts, can replace part of traditional PTZ camera and thus save lost of traditional mechanical Pan/Tilt maintain cost.

Further functions include two-way audio, DI/DO alarm application and micro SD card support for local storage application.

1.2 Features

This manual will illustrate the steps of how to setup and operate this IP camera, so you'll also soon be enjoying the benefits of these product features:

- 5-Megapixel CMOS Sensor
- 15 fps@1920x1920 Full HD
- Dewarping the Image via Fisheye Correction Processor
- Removeable IR-cut Filter for Day & Night Function
- Real-time H.264, MPEG-4, and MJPEG Compression
- ROI (Region of Interest) Provide for 5 Independent Streams
- Minimum 0.1 Lux for Night Vision
- WDR Enhancement for Visibility in Extremely Bright or Dark Environments
- Two-way Audio Communication, built-in Microphone and Audio Output
- Built-in MicroSD Card Slot, support SDHC/SDXC 64GB or above
- Whether-proof IP67-rated Housing
- Built-in 802.3af Compliant PoE
- OnVIF Compliant for Interoperability

1.3 Product Specification

Camera	FE-501OD
CPU	Multimedia Soc (System-on-Chip)
NOR Flash	16MB
RAM	512MB
Camera Features	
Image Sensor	1/2.5" Progressive CMOS Sensor
Maximum Resolution	1920x1920
Lens Type	Fisheye Fix Lens
Focal Length	f=1.05mm
Aperture	F=2.8
Field of View	180°(Horizontal/Vertical/Diagonal)
WDR Technology	WDR Enhanced
Day/Night	Removable IR-cut filter for day & night function
Minimum Illumination	1.9Lux @F2.8(Color) ; 0.1Lux@F2.8(B/W)

Pan/Tilt/Zoom	ePTZ:10x digital zoom
On-board Storage	Built-in MicroSD card slot, support SDHC/SDXC 64GB or above
Video	
Compression	H.264, MJPEG & MPEG-4
Display Mode	360° Source View, 360° Broad View, 180° Double Broad View, Triple View, Quad View, 3 PTZ with Source View
Maximum Frame Rate	15fps@1920x1920 15fps@1920x1080 30fps@1600x1200(HI-FPS Mode) 30fps@640x480
Maximum Streams	5 simultaneous streams at ROI Mode 3 simultaneous streams at Normal Mode
S/N Ratio	Above 39 dB
Dynamic Range	100 dB
Video Streaming	Adjustable resolution, quality and bitrate ROI(Region of Interest) Provide for 5 Independent Streams
Image Settings	Adjustable image size, quality and bitrate Configurable brightness, saturation, exposure control, sharpness, contrast, white balance, auto shutter control, auto gain control, noise reduction, EV luminance control, flip & mirror, privacy masks, time stamp, text overlay
Audio	
Audio Capability	Audio input/output (full duplex)
Compression	G.711u
Interface	External microphone input
Effective Range	5 meters
Network	
Users	Live view for up to 10 clients
Protocols	HTTP, HTTPS, TCP/IP, IPv4, UDP, SMTP, FTP, DHCP, DDNS, NTP, DNS, ARP, RTSP, RTP, UPnP, OnVIF(Profile S), Multicast
Interface	10 Base-T/100 Base TX Ethernet(RJ-45)
OnVIF	Ver.2.2
Intelligent Video	
Motion Detection	Ten-window video motion detection

Alarm and Event	
Alarm Triggers	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification
Alarm Events	Event notification using digital output, HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server
General	
Connectors	RJ-45 cable connector for Network/PoE connection Audio input Audio output DC 12 V power input Digital input*1 Digital output*1 Video output*1(NTSC/PAL)
Power Input	DC 12V IEEE 802.3af PoE
Power Consumption	Max. 5.1W(DC 12V) Max. 5.3w(PoE)
Dimensions	Ø: 140 x 78.4mm
Weight	Net: 970g
Safety Certifications	CE, FCC Class B, LVD
Operating Temperature	0°~50°C
Operating Humidity	10%~80%
System Requirements	
Operating System	Windows® 2000, XP, Vista, 7
Web Browser	Mozilla Firefox 7~10, Internet Explorer 7.x or 8.x, Chrome/Safari 4.0 or above
Video Player	VLC, Quick Time, Real Player, Core Player

1.4 System Requirement

For normal operation and viewing of the network camera, it's recommended that your system meets these minimum requirements for proper operation:

Item	Requirements
CPU	Intel Core 2 Duo E8600(3.33GHz) or higher
VGA Monitor	Resolution1280 x 1024 or higher
RAM	Minimum 2 GB of RAM
Operating System	Window XP, Vista, 7, 8
Web Browser	Internet Explorer 9 or later; Apple Safari; Firefox; Google Chrome
Recorded File Playback	Microsoft Media Player 11.0 or later

Note: Please keep updating the latest Windows software and service package.
(Ex: Net Framework, Windows Media Player, Enhance ActiveX Security)

2

Package Contents and Installation

2.1 Package Content

User can find the following items in the package as below:

1. **FE-501OD** is the main element of the product.
2. **Power Adapter** dedicates 12V DC electric power output to Network Camera.
3. **Bundle CD** provides installation software, application program, important information and instructions for operating the Network Camera.
4. **Quick Start Guide** provides important information and instructions for installing this device.


2.2 Connections

Power Source Requirement


This camera can work with 802.3af PoE switches. However, if you don't have the PoE switch, you can use a power adapter to provide power to camera.

Connectors

Please refer to the diagrams below for the definition of each connector.

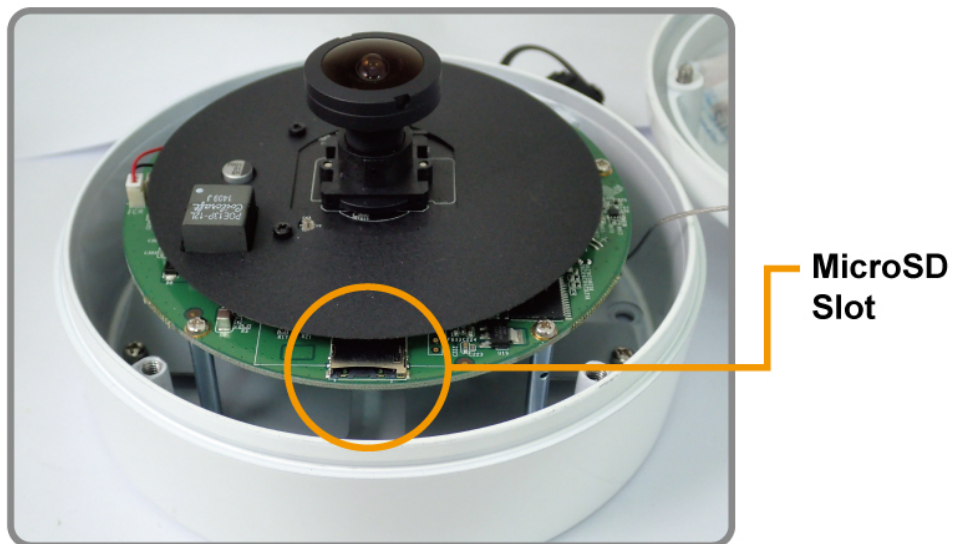


Camera provides extra connections with outside devices via water proven RJ45 connector. User can make the connectors to support 1) Video Out, 2) Audio In, 3) Audio Out, 4) Terminal Block for GPIO. Please refer to following figure of extensive compound cables that user can DIY easily:

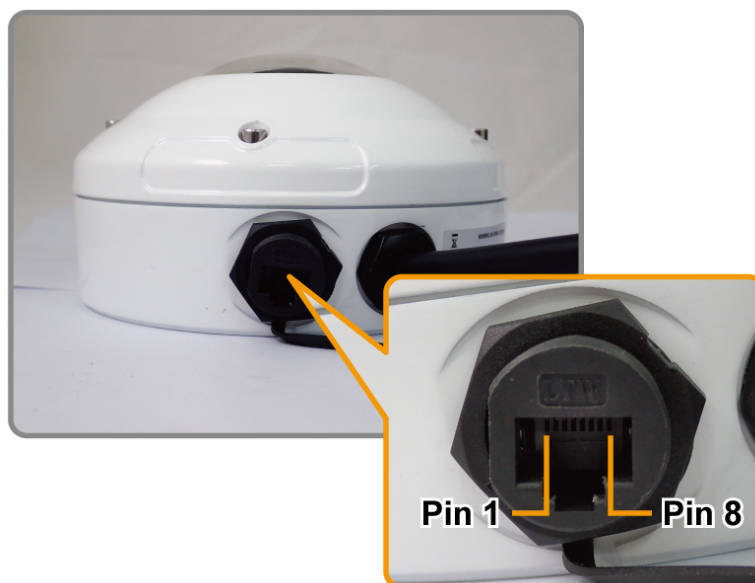

***NOTE:** This Compound Wire is optional, please contact with us if you need it.

The Connections Diagram of Compound Wires and Pin Definitions:

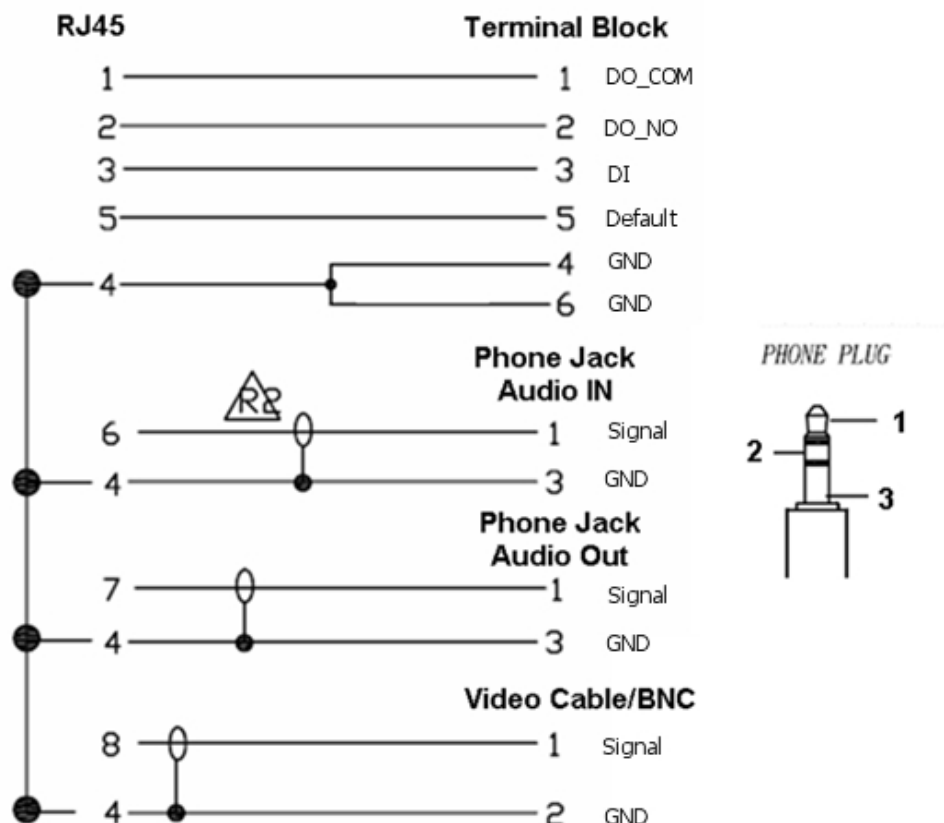

Pin	Function	Description
1	DO_COM	Digital Output: each digital output pin to COM (Pin1) is a photo-coupled relay on Normal Open status. External device can directly connect to the terminals. However the current that will go through the 2 nodes must not exceed 130mA. An external “Relay” can also be connected to the terminals as an implementation. In this case, current (or/and voltage) limitation is specified by the external Relay. Digital Input: Only one set is designed in this Camera Model. The internal device is also photo-coupled electrical relay; and the external device can be simply an On/Off switch. Each set of On/Off switch can be connected as one trigger source.
2	DO_NO	
3	DI	
4	GND	

5	Default Setting	Default Setting: Short Pin4 and Pin5 with a wire PIN with a short wire to revert to factory default settings. Break the short when the LED starts quick flashing, and then camera will reboot automatically a few minutes later.
6	Audio In	
7	Audio Out	
8	CVBS Out	Don't forget to connect Audio In / Audio Out / CVBS Out GPIO Pin to GND for active; or leave floating (or unconnected) to deactivate.

2.3 Install the Camera in LAN




1. Be sure that your PC or laptop has connected to your local Ethernet network.(HUB or Switch)
2. Be sure that IP Camera has connected to your local networking via the LAN port (RJ45) on the extension cable. (For PoE model, user can use PoE Switch as power supply)
3. Plug the jack of power adaptor into power jack on the extension cable.
4. Ensure the power adaptor specification matches the power system (110V or 220V) and plug the adaptor into the outlet(This step is optional if used PoE switch for PoE model)
5. Use AirLive IP Wizard software utility in CD and launch browser to start connecting with PC.

2.4 Connect to IP Camera


1. Insert the bundled CD into your PC/Laptop.
2. Auto Run screen pops up, click “Install Software → AirLive IP Wizard II” to install the configuration tool.



3. After completing installation, run the “Air Live IP Wizard II” to start to search the IP camera.

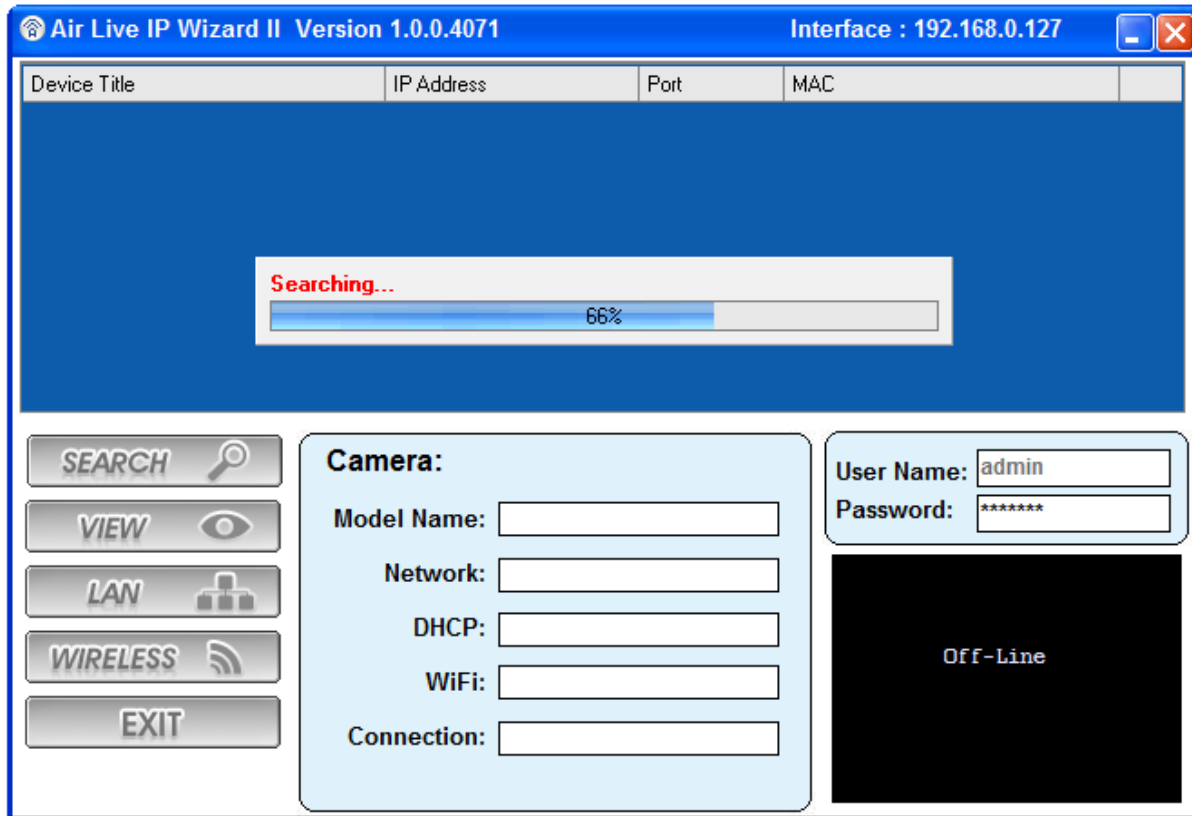

4. The entire detected IP camera will be listed out.

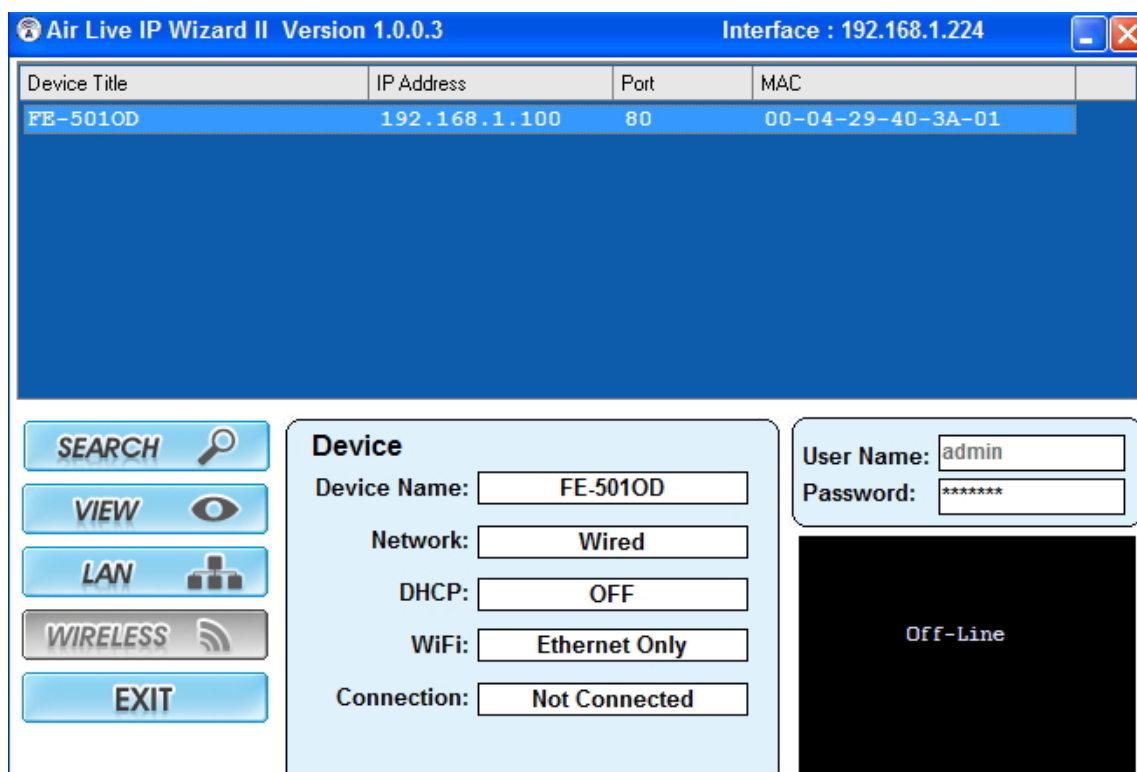

5. If the Camera's IP address is in the same IP segment as your LAN, select the founded IP Camera and double click on the item. Then, the default browser will show up and connect to the IP camera's Web automatically.

3

Using IP Camera via Web Browser

3.1 Windows Web Browser

1. Open your web browser and enter the IP address or host name of the IP camera in the Location / Address field of your browser.
2. Use the default account “**admin**” and default password “**airlive**”.




Note: The default user name “**admin**” and the password “**airlive**” are the default values. You can change them in the Security Menu. (Please check “Configuration → Security”)

3. The monitor image will be displayed in your browser. In the left side of main window, you can configure the settings you want. For more details, please refer to the following chapters.

4

Operating the Network Camera

You can operate live view function on the main page, please refer to the description below:

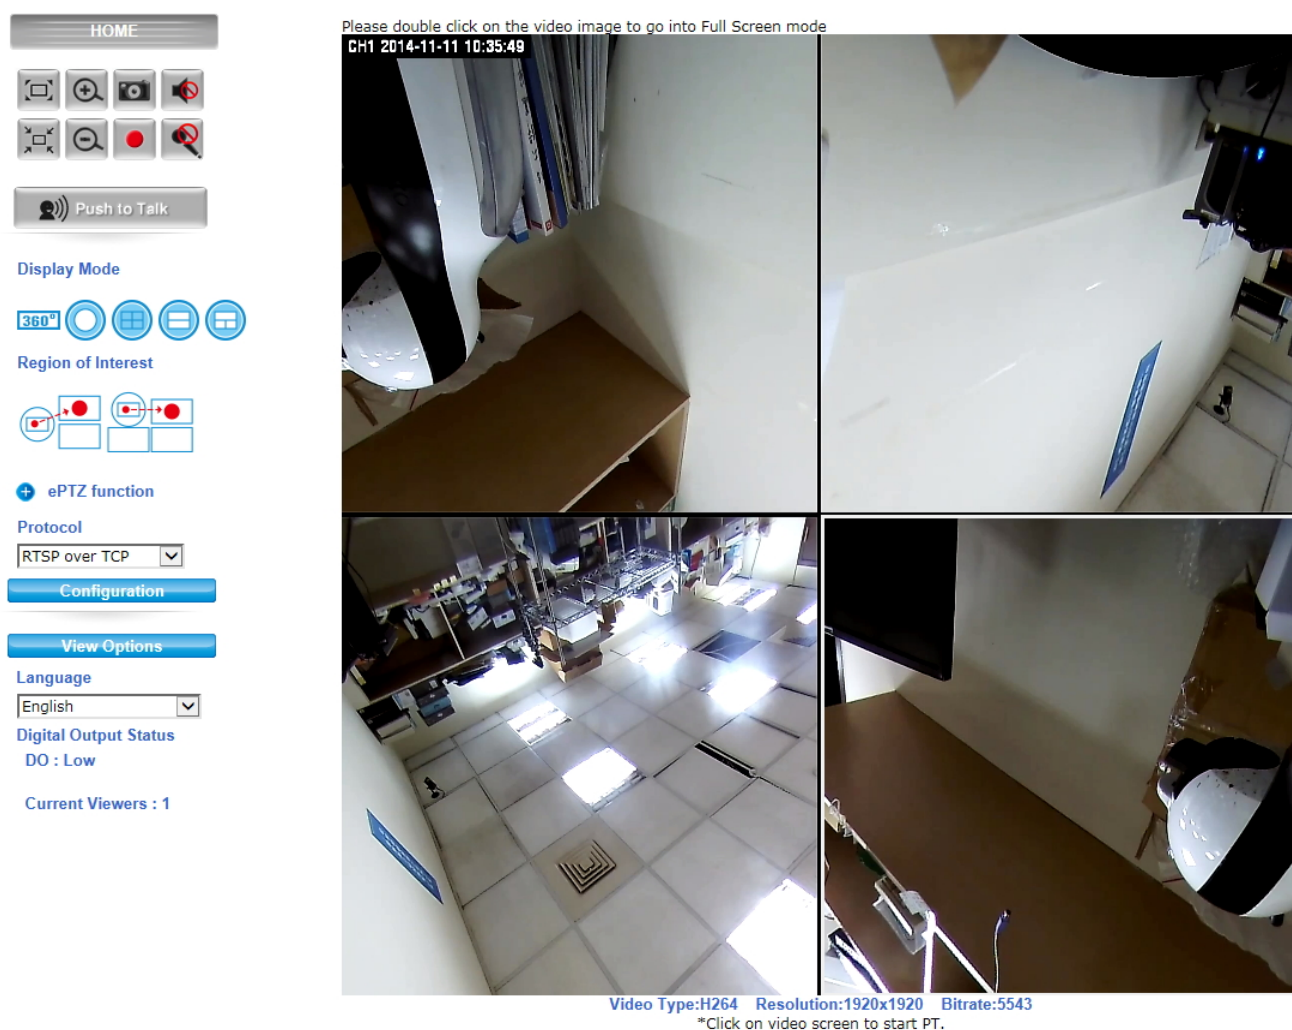

Please double click on the video image to go into Full Screen mode

CH1 2014-11-11 10:35:49

Video Type:H264 Resolution:1920x1920 Bitrate:5543

*Click on video screen to start PT.

4.1 Live View

1. **Original size**  / **Preview Size** 

Switches live image view between original size (Depends on main stream setting) and preview size.

2. Digital Zoom



You can see larger objects in video.

Note: The digital zoom uses computer algorithm to enlarge the video and may lose some details.

3. Snapshot



Take a snapshot and save images into your computer.

4. Record



Press Record button to start recording and press Stop to terminate the recording.






5. Speaker / Microphone



You can enable or disable the speaker/microphone function here.

After enable any of these two function, you can adjust the volume by dragging the bar.


6. Display Mode

	360 degree Broad View
	360 degree Full View
	Quad View
	Double-Broad View (180 degree Ultra Wide Angle View x 2)
	Triple View (180 degree Ultra Wide Angle View + Twin PTZ View)


7. Region of Interest

Two Operation Modes (Triple and Quad with Source View) are supported.

After ROI mode is selected, "Enable ROI (Stream)" function will appear.



For the first time use, you may Left-click the mouse button under lower-left, upper-right or lower-right Live View Window. Then you could see a **x1 frame** displaying in the Source View Window.

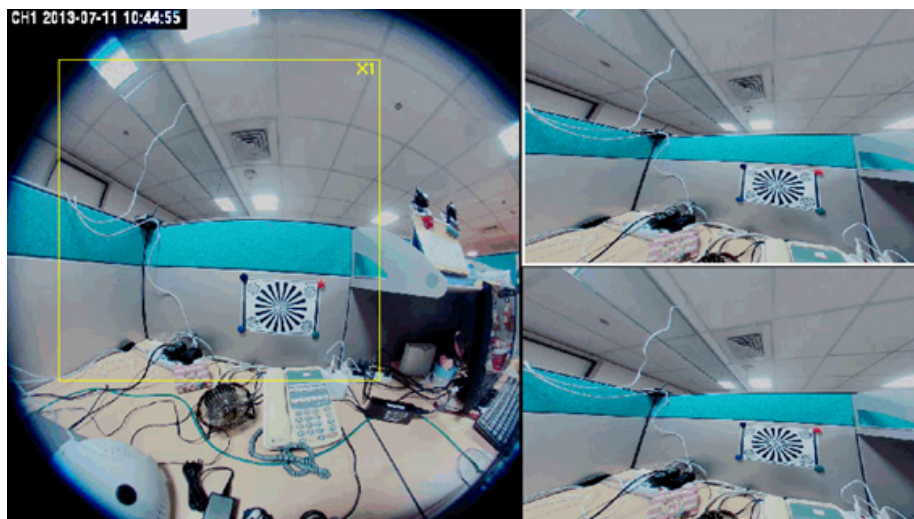






Scrolling the mouse wheel could change region's magnifying power (x1 to x10); and dragging the frame with mouse could move the amplified region. In the meanwhile, you could also see region's amplification effect displayed real time in the lower-left, upper-right or lower-right Live View Window.



While ☒ **Enable ROI (Stream)** is checked, each window could be treated as an individual stream.


Such as Quad with Source View will have five stream output maximum at the same time.



- **rtsp://camera ip address/live1.sdp** means whole display window  could be seen.
- **rtsp://camera ip address/live2.sdp** means upper-left Source View Window  could be seen.


- **rtsp://camera ip address/live3.sdp** means upper-right Display Window  could be seen.
- **rtsp://camera ip address/live4.sdp** means lower-left Display Window  could be seen.
- **rtsp://camera ip address/live5.sdp** means lower-right Source Display Window  could be seen.

8. ePTZ function

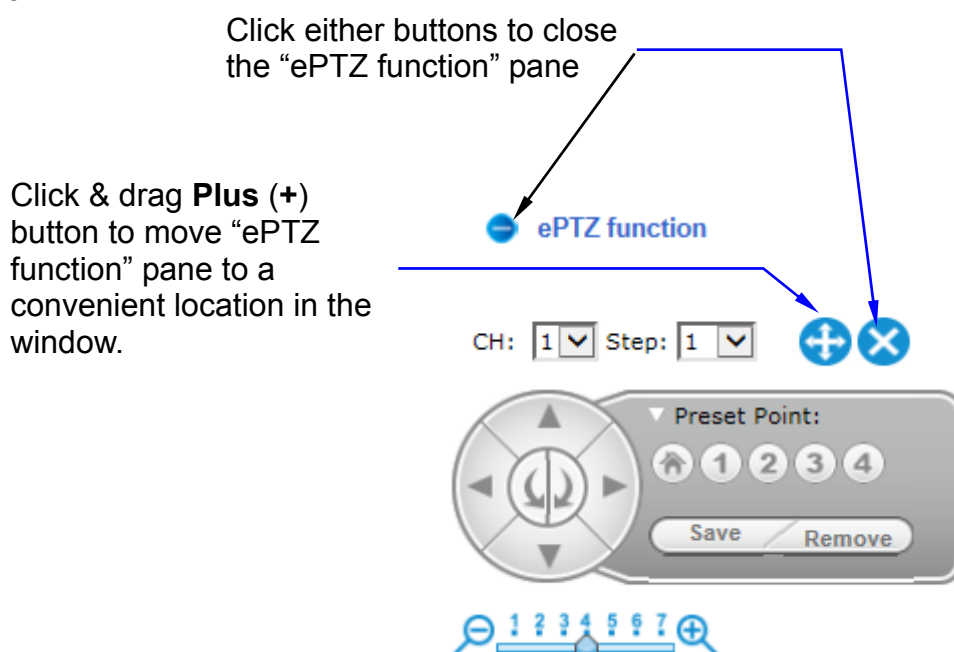When the Double-Broad View, Triple View or Quad View PTZ display mode is selected, click the “ePTZ function” tool to display the PTZ setting tools as shown and explained below.



- **CH:** Select the PTZ channel or display window (1, 2, 3 or 4) to implement PTZ setting.
- **Step:** Adjust and set the speed of live view panning motion.
- **Zoom Slider:** Drag slider to zoom-in and zoom-out the selected scene. Zoom setting is saved with the selected pre-defined point of view area.
- **Directional Buttons:** Use to manually pan or rotate  the scene to select and zoom a specific area (1 of 4 maximum) to be monitored. To reset the scene back to its original status, click the Home  button. You can also directly click the mouse button on the video to drag for pan and tilt, roll the mouse wheel for zoom a selected area.

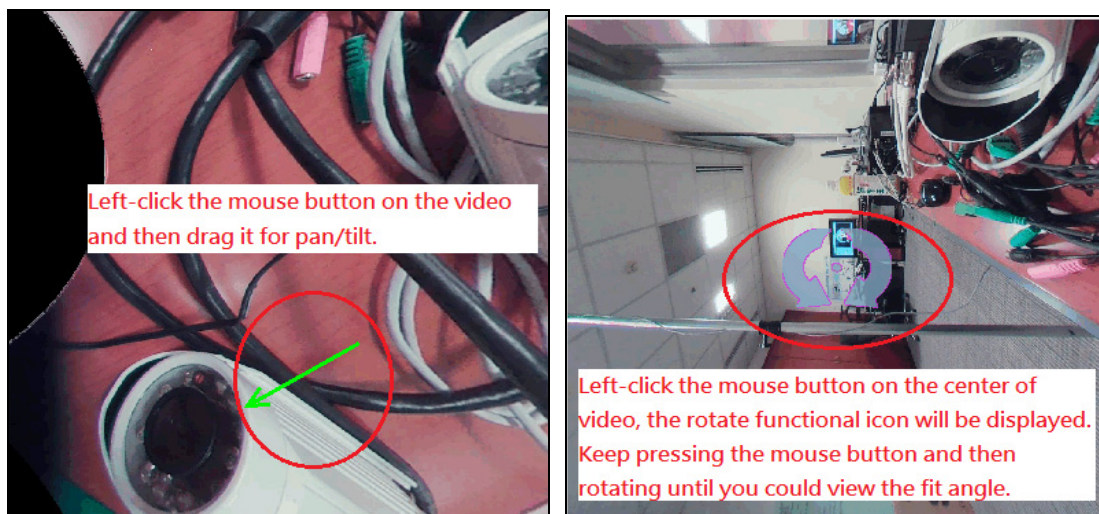

- **Preset Point:** After panning and zooming, assign the selected area a Preset Point (1 to 4) and click “Save” button to store the setting. The pre-defined point of view areas will be monitored in sequence. To cancel the selection, click “Remove” button.

9. Protocol

User can select proper streaming protocol according to network environment.


10. View Options

It is a pull-down list for video streaming.

11. Language

FE-501OD support multi-language.

Language

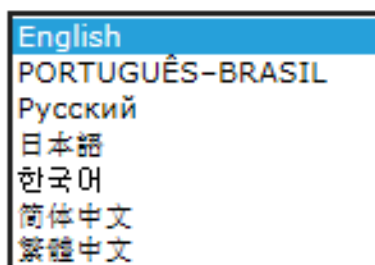

4.2 Configuration


Click “Configuration” for the camera’s detail settings. For more information, please refer to Chapter 5.

5

Configuration

Click the “**Configuration**” to display sub-menus included:

Network / Video / Audio / Event / Storage / System

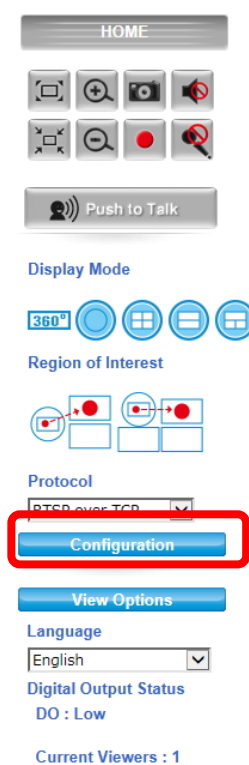

Please double click on the video image to go into Full Screen mode
CH1 2014-11-11 10:34:04



Video Type:H264 Resolution:1920x1920 Bitrate:5547

5.1 Network

In this menu, you can configure network function here.

1. General



Network



Network Settings

☒ DHCP
☐ Fixed IP Address
☐ PPPoE

Port Settings

HTTP Port:

80

RTSP Port:

554

Save

The "General" tabbed pane (shown above) allows you to redefine the network and port protocol settings of the Network Camera.

Network Settings:

- DHCP: This option obtains the available dynamic IP address assigned by the DHCP server each time the Camera is connected to the network.
- Fixed IP Address: This option manually assigns a static IP address to the Network Camera. The default setting is **192.168.1.100**.
- PPPoE: Select this option to set PPPoE account & password.

• PPPoE

PPPoE User Name:	<input type="text"/>
PPPoE Password:	<input type="password"/>
Recipient E-mail Address:	<input type="text" value="rcpt@mail.com"/> (ex: rcpt@mail.com)
SMTP E-mail Server:	<input type="text" value="192.168.1.1"/> (ex: mail.examples.com or 192.168.1.1)
SMTP Port:	<input type="text" value="25"/> (0..65535)
SMTP user name:	<input type="text" value="guest"/>
SMTP Password:	<input type="password" value="•••••"/>
Sender E-mail Address:	<input type="text" value="from@mail.com"/> (ex: from@mail.com)
Use SSL-TLS:	<input type="text" value="None"/> ▼

While PPPoE protocol is selected, you may have to enter some more information such as the above picture.

While Camera IP is changed dynamically because of PPPoE Network Connection, its new IP Address will be sent to “Sender E-mail Address” through SMTP service. So you won’t worry about the difficulty in Camera’s Webpage access.

※ As for the settings of SMTP Service, kindly please contact with your E-mail service provider ◦ After you confirm all parameters are correct and working properly, you may enter them into the text area manually.


Port Settings:

- HTTP Port: Re-define the existing HTTP Port number in the text box.
- RTSP Port: Re-define the existing RTSP Port number in the text box.

Save

: After setups are completed, click “Save” button to apply the settings.

2. DDNS

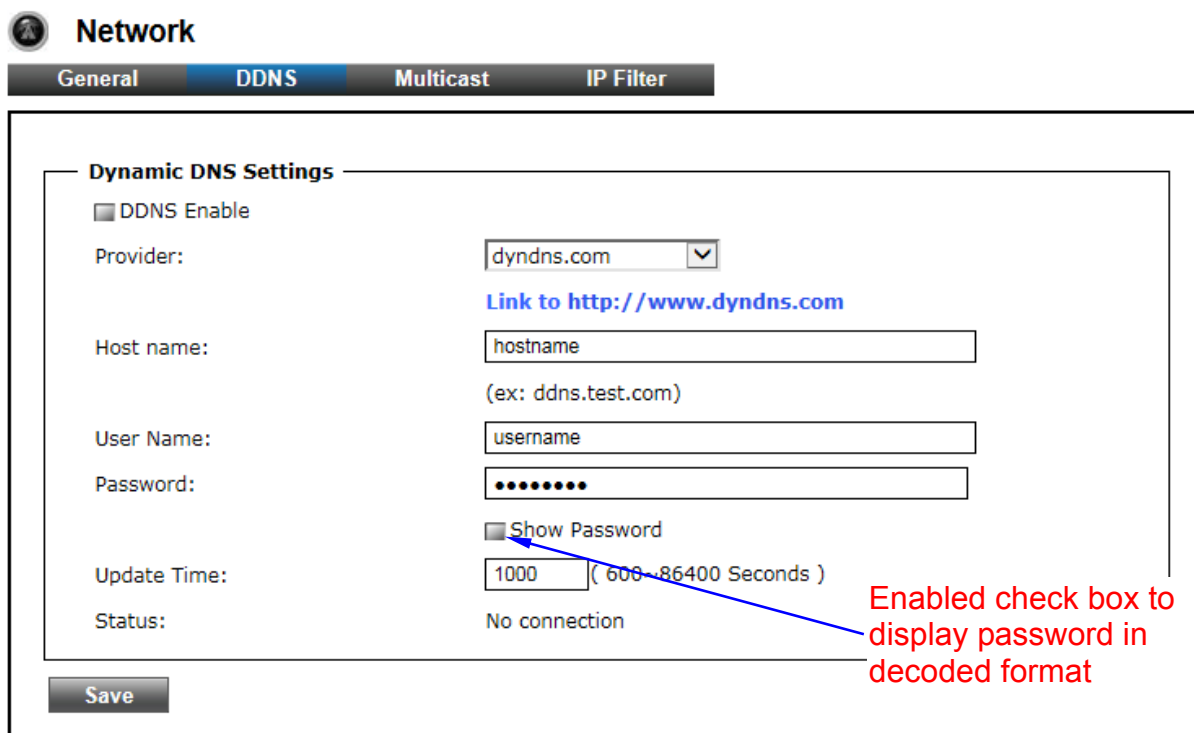

Network

General **DDNS** Multicast IP Filter

Dynamic DNS Settings

☐ DDNS Enable

Provider: dyndns.com

[Link to http://www.dyndns.com](http://www.dyndns.com)

Host name: hostname
(ex: ddns.test.com)

User Name: username

Password: ••••••••

☒ Show Password

Update Time: 1000 (600 ~ 86400 Seconds)

Status: No connection

Save

Enabled check box to display password in decoded format

The “DDNS” tabbed pane allows you to configure the Dynamic Domain Name System of your network device with a host name instead of the IP Address.

DDNS Enable: Enable the check box to support DDNS function.

Host Name: Enter the Host name which you registered and got through DNS Service Provider. The assigned host name is used to access the network device instead of IP Address.

User Name/Password: Account authentication for logging into the website of DNS Service Provider.

Update Time: Define a time interval for the device to periodically update and check its access status with website of DNS Service Provider.

Save : After setups are completed, click “Save” button to apply the settings.

3. Multicast Tab

Network

General DDNS **Multicast** IP Filter

Multicast Settings

Multicast Group Address: (224.3.1.0 ~ 239.255.255.255)

Multicast Port: (1 ~ 65535)

Multicast TTL: (1 ~ 255)

Stream 1

☐ Enable

Multicast Video Port: 5560

Multicast Audio Port: 5562

Multicast Metadata Port: 5564

Stream 2

☐ Enable

Multicast Video Port: 5566

Multicast Audio Port: 5568

Multicast Metadata Port: 5570

Stream 3

☐ Enable

Multicast Video Port: 5572

Multicast Audio Port: 5574

Multicast Metadata Port: 5576

Save

Check the "Enable" box to open **UDP Multicast Streaming** function of stream 1, 2 or 3.

The "Multicast" tabbed pane allows you to open Camera's UDP Multicast Streaming function.

By default, Camera's live stream belongs to RTSP Protocol. It means camera has to send an individual streaming for each client wish to see the videos. So the more the client number is, the larger the network bandwidth required and the bigger loading of the camera.


In other words, the camera can send just one streaming and each client can receive the streaming with Multicast Protocol.

Even with the client number increasing, the network bandwidth is still the same loading with one camera.

Save

: After setups are completed, click “Save” button to apply the settings.

4. IP Filter

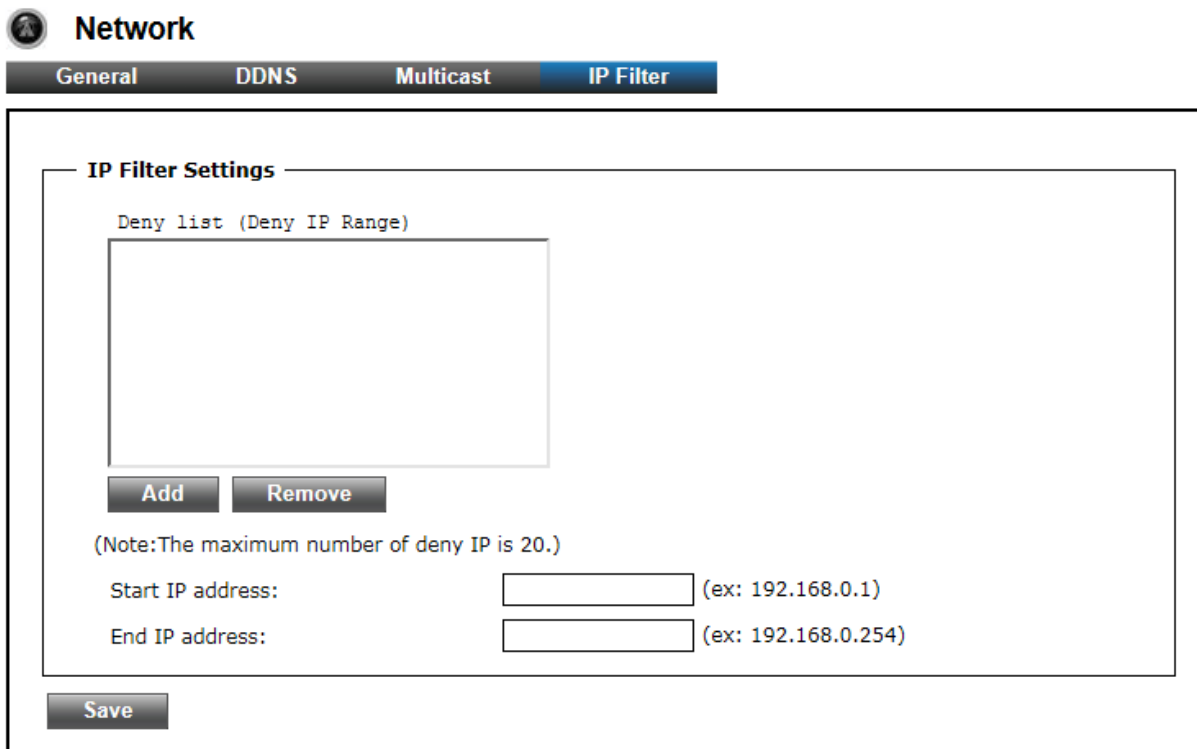

The “IP Filter” tabbed pane could let you configure device IP list which is denied access to this camera.

Add

:

- Start IP address: Fill in the first address of IP range which you would like to deny its access to camera.
- End IP address: Fill in the last address of IP range which you would like to deny its access to camera.

※ please note that total device numbers listed in the Deny list would be limited to 20.

Save


: Filling the IP range, then click “Save” button to implement the settings.

Remove

: If you would like to re-open the access right of those listed device, select it from the list and then click “Remove” button to apply the settings.

5.2 Video

1. Stream

 Video
Stream Video Privacy Mask

Video quality settings for stream 1

Connection template: Customized

Mode: H264

Frame Size: 1920x1920

Maximum Frame Rate: 15 FPS

Streaming Mode: CBR

Bitrate: 6 Mbps

Intra frame period: 15

☐ Text Overlay

Text Field: CH1

☒ Time Stamp

RTSP Port Access Name: live1.sdp

Video quality settings for stream 2

Connection template: Customized

Mode: H264

Frame Size: 1600x1200

Maximum Frame Rate: 15 FPS

Streaming Mode: CBR

Bitrate: 2 Mbps

Intra frame period: 15

☒ Text Overlay

Text Field: CH2

☒ Time Stamp

RTSP Port Access Name: live2.sdp

Video quality settings for stream 3

Connection template: Customized

Mode: H264

Frame Size: 640x480

Maximum Frame Rate: 15 FPS

Streaming Mode: CBR

Bitrate: 768 Kbps

Intra frame period: 15

☒ Text Overlay

Text Field: CH3

☒ Time Stamp

RTSP Port Access Name: live3.sdp

The “Stream” tabbed pane (see above figure) provides the adjustments for the video quality of the Camera streaming function. The pane offers the following three modes of video quality setting:

- Video quality settings for stream 1: This is the primary quality setting for live view streaming.
- Video quality settings for stream 2: This is the secondary quality setting for live view streaming.
- Video quality settings for stream 3(Recording Stream Quality): This setting is geared for Recording Stream saved in the SD Card use.

※ If the “Video Event Alarm Setting by Video” is enabled, an alert message will display requiring you to disable the feature first before proceeding to change the Streaming settings. Otherwise, adjustments to video quality streaming settings **cannot** be accomplished.

The quality setting items on this pane are as follows:

- Connection template: Four option modes are available; “Fast,” “General,” “Low,” and “Customized” modes.
- Mode: Three modes of encoding options are offered; “H264,” “MJPEG,” and “MPEG4.”
- Frame Size: 3 types of streamed frame resolutions are available to select; “1920x1920,” “1920x1080,” and “1600x1200”
- Maximum Frame Rate: Available rate options are; 1, 2, 3, 5, 8, 10 & 15 frames per second (FPS).
- Streaming Mode: Two choices of streaming modes are offered; “VBR (variable bit rate)” and “CBR (constant bit rate).”
- Bit Rate: The options for streaming mode quality are expressed differently between VBR and CBR
 - *VBR*: Standard, High, Highest
 - *CBR*: 64K bps, 128K bps, 184K bps, 200K bps, 256K bps, 384K bps, 512K bps, 768K bps, 1M bps, 1.5M bps, 2M bps, 3M bps, 4M bps, 5M bps, 6M bps, 8M bps, 10M bps and 12M bps.
- Intra frame period: Available choices are; 5, 8, 10, 15, 20, 25, 30, 40, 50 & 60 frames per period. This function will let you choose how long distance between two I-Frames.

Larger value means longer distance between two I-Frames and this selection is suitable for the stable Network Bandwidth Environment; so we suggest the smaller value selection is proper to the worse Network Bandwidth Environment.

- Text Overlay: When enabled, each streamed frame will be overlaid with the Camera ID (text field) and stamped with date/time (if enabled) as illustrated below.

☒ Text Overlay

Text Field:

CH1

☒ Time Stamp

- RTSP Port Access Name: When RTSP or VLC media-player is used, the port can be renamed with easy to remember pathname.
For example: the default RTSP Port Access Name is live1.sdp ; it means your playback stream name would be “**RTSP://camera’s IP address/live1.sdp**”

Save

: After setups are completed, click “Save” button to apply the settings.

2. Video:



Video

Stream

Video

Privacy Mask



Video Settings

Brightness: 0 (-128~127)

Saturation: 128 (0~255)

Contrast: 0 (-128~127)

Sharpness: 16 (0~31)

Color/Mono Mode: ☒ Auto ☐ Color ☐ Mono

Day / Night Threshold: 10 (5~100)

ICR: ☒ Auto ☐ On ☐ Off

Exposure Mode:

Power Frequency: ☐ 50 Hz ☒ 60 Hz

☐ Pre-Noise Reduction

☒ 2D Noise Reduction

Normal Strength: 140 (0~168)

Source View Video Orientation:


Wide Dynamic Range: ☐ Enable ☒ Disable

White Balance:


Camera Mount: ☒ Ceiling ☐ Wall ☐ Hi-FPS

The “Video” tabbed pane lets you to perform live adjustments and improvement of the Camera captured video effect relative to the target environment.


- Brightness: The luminance of the captured image apart from its hue or saturation. Try to assign the fit value according to the environment.

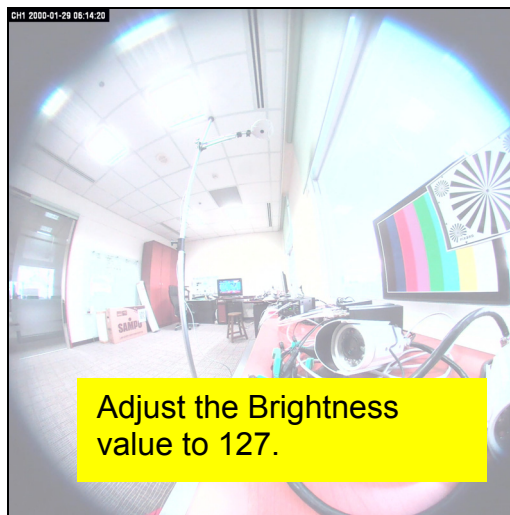



- Saturation: The degree of intensity and purity of a specific color. Try to assign the fit value according to the environment.

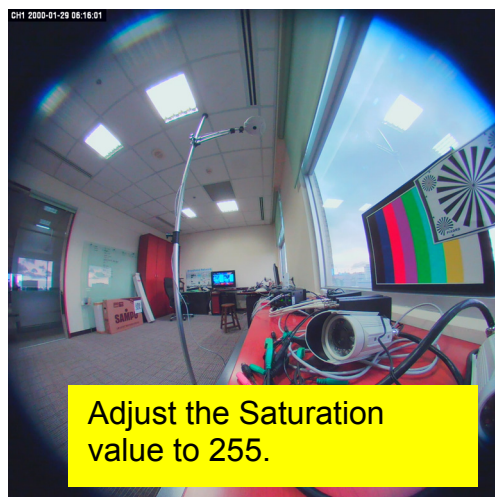

- Contrast: The brightness ratio of the lightest to the darkest part of the video image. Try to assign the fit value according to the environment.

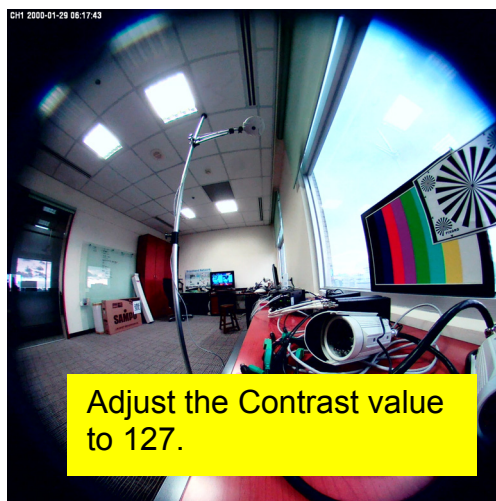


- **Sharpness:** Sharpness can be defined as edge contrast. So when we increase sharpness, we increase the contrast only along/near edges. Try to assign the fit value according to the environment.

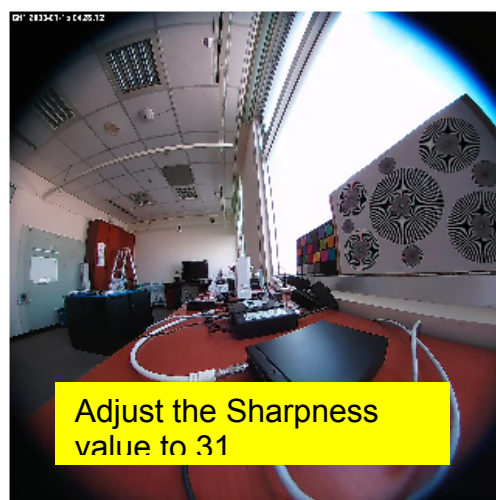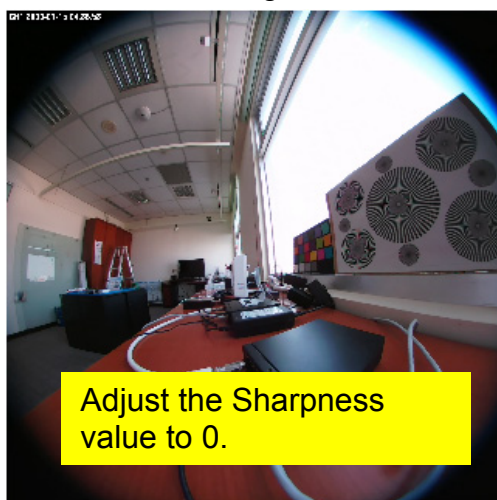

- **Day/Night Threshold:** Set the illumination lux value (5 ~ 100) to auto-trigger the Camera into “day” or “night” mode relative to luminance of the area under surveillance. When the environment luminance becomes higher than the set lux value, the Camera will auto switch to “day” or “color” mode. Otherwise, it will remain at “night” or “mono” mode.



- ICR: Used for the camera to produce true color images, which avoid the color deviation for the capture images effectively.
- Exposure Mode: There are three options (Auto, Manual, and Clear Motion). When you select Manual mode, you can adjust Sutter speed.
- Pre-Noise Reduction & 2D Noise Reduction: Both of them are one kind of technology to provide clearer video with less noise under poor lighting conditions, making it easier to identify people or objects. Try to set them according to the stream quality.
- Wide Dynamic Range: Enable this function could let camera provide clear images even under backlighting.

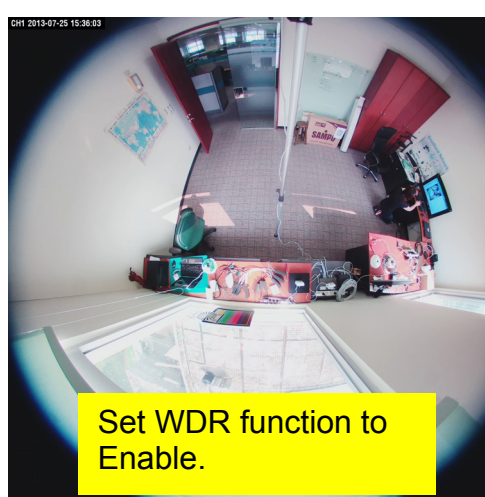

- White Balance: Because camera doesn't have ability to automatically adjust different color (temperature) to the environment, six templates are provided to let you choose for different light.

White Balance:

- Auto
- Incandescent Light
- Cool White Fluorescent Light
- SunLight
- Cloudy
- SunShade

- Camera Mount: Three camera mounting types could be chose and will also bring different kinds of Display Mode.

- *Ceiling*:

Display Mode



- *Wall*:

Display Mode




- *Hi-FPS*:

Display Mode



, raise to 30 frames per second and the max resolution value is 1600x1200@30fps.

3. Privacy Mask:

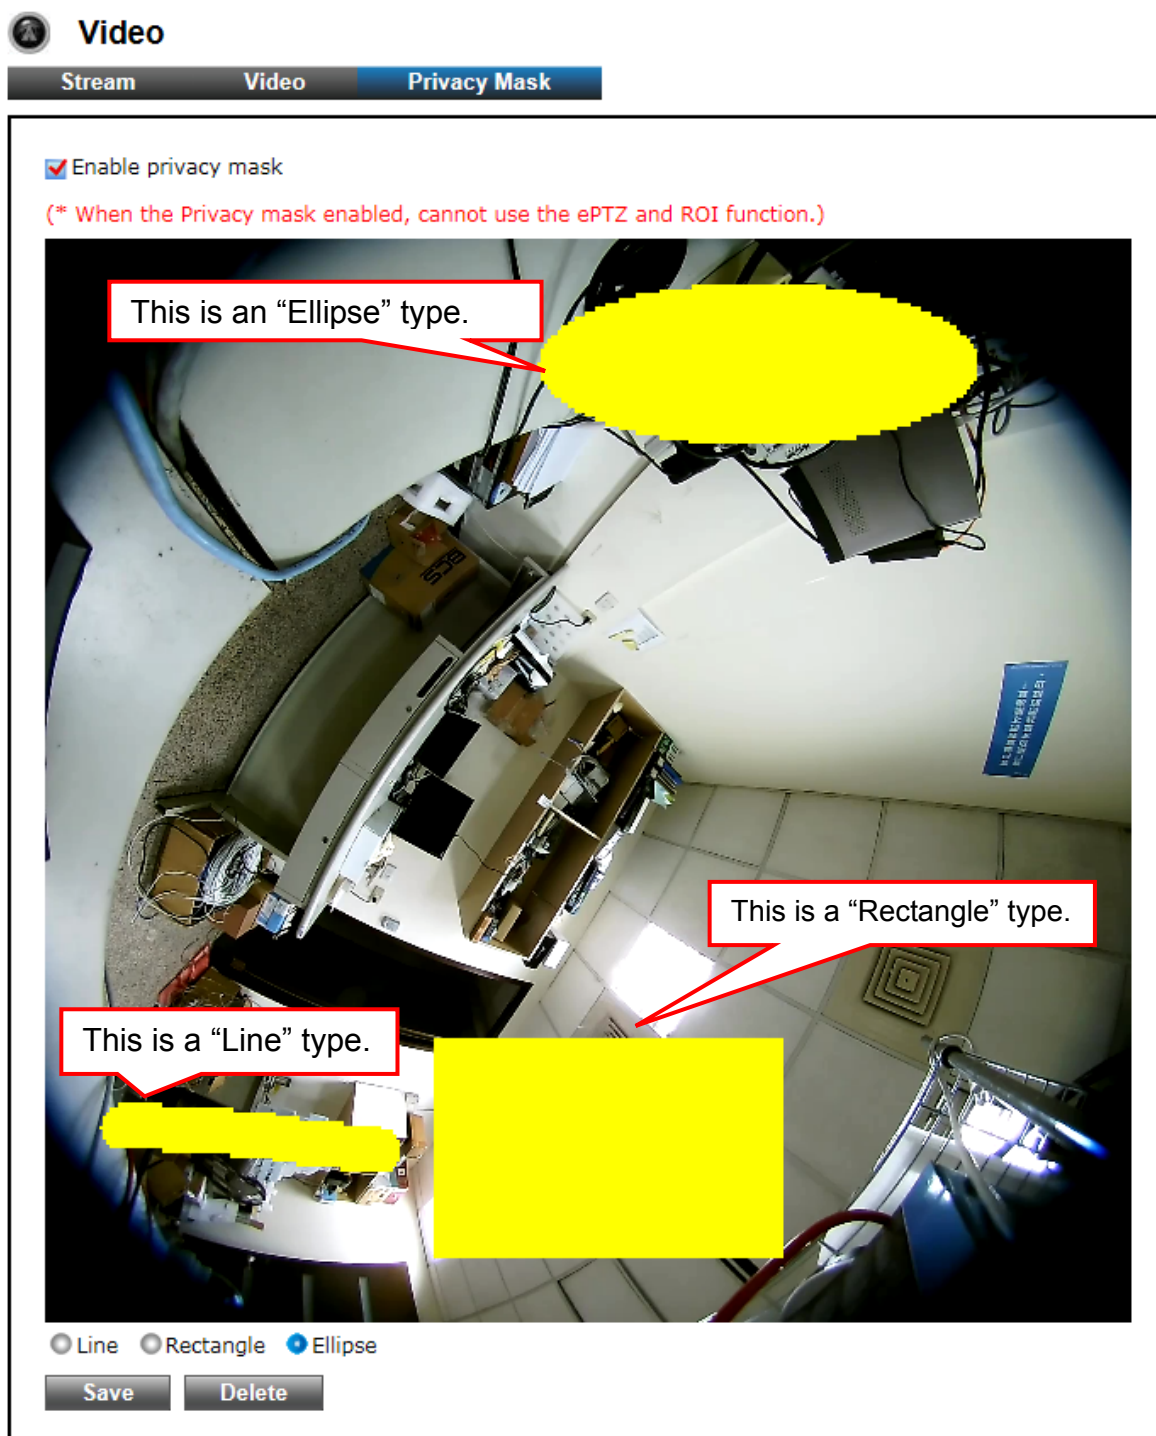

The "Privacy Mask" tabbed pane allows you to mask or block private areas from surveillance for privacy reason.

■ To block a private area from surveillance, follow the procedure below:

- 1) Initially select the masking shape, e.g., “Line,” “Rectangle,” or “Ellipse” (see figure above) you wish to use as screen to block the area from surveillance.
- 2) Click and drag the mouse cursor to lay out a masking screen on the area you wish to block, and then release the mouse right button. Notice that the laid out screen turns into phantom block.
- 3) If the laid out screen needs correction, click “Delete” button and redo the masking screen lay out process.
- 4) Once the masking screen is acceptable, click the “Enable Privacy Mask” check box followed by clicking of the “Save” button. This will turn the laid out screen into solid block.

5.3 Audio

1. System



Audio

Audio

Audio Settings

Type: G.711 u-Law

☐ Mute

Save

The “Audio” tabbed pane provides the following audio adjustments to your Camera microphone and speaker.

- Type: Select which kind of codec you would like to set as Audio-In signal output format.
- Mute: Enable or disable mute function of the Camera’s Audio-In signal.

Save

: After setups are completed, click “Save” button to apply the settings.

5.4 Event

1. Motion Detection



Event


Motion Detection

Video

Snapshot

Motion Settings

☒ Enable Motion Detection

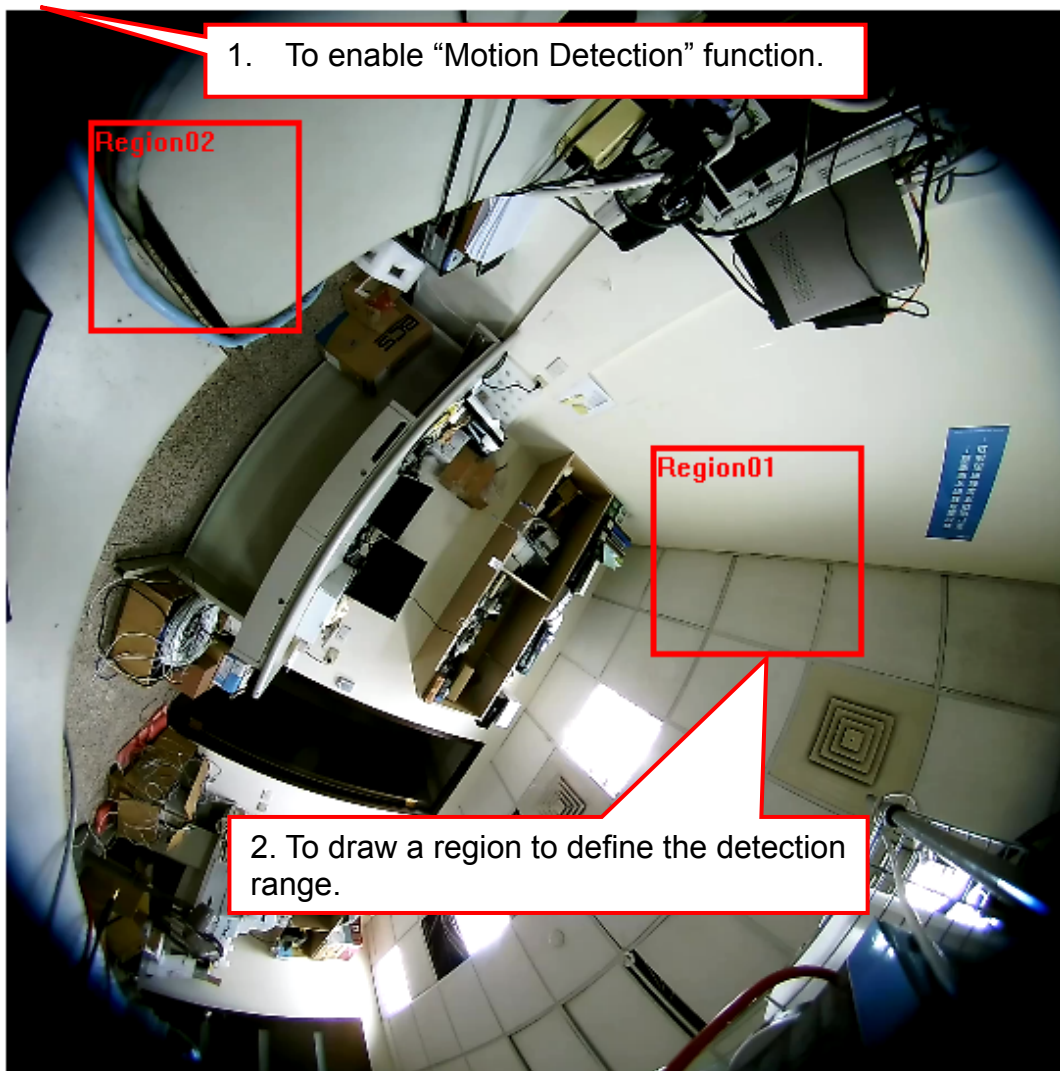

Add

Delete

Save

Refresh

(Note: The maximum number of motion detections is 10.)

Set New Motion Detection Area :

1. Click 'Add' and rename the windows area.
2. Drag a detection area on the image.)

Window Name:

Region02

Trigger Level:



85

(0~100, Low~High)

Sensitivity:



85

(0~100, Low~High)

From the “Motion” tabbed pane, you can define specific target areas within the scope of surveillance to focus the motion detection function.

■ Defining multiple motion detection areas:


- 1) Enable the “Enable Motion Detection” check box.
- 2) Click “Add” button and a default frame will pop-up on the screen.
- 3) Click and hold inside the frame to drag it to the location where you want to focus detection. Resize the frame by dragging its corners or borders.
- 4) To assign unique names to each framed location for easy identification, click on the frame and a “Window Name” text box with the default name of the selected frame, will appear at the bottom of the pane (see figure below). Enter a new name and click the “Save” button. Wait for a while for the change to take effect.
- 5) To delete a frame that is no longer needed but was previously saved, click on the unwanted frame and click “Delete” button. The frame will disappear after a while.
- 6) To delete multiple frames that are not yet saved, directly click the “Refresh” button instead of deleting them individually. The “Refresh” button will automatically clears all unsaved frames.

. ✖ Total defined motion detection areas cannot exceed 10 frames.

2. Video

The Video tabbed pane sets the video recording trigger method to use when motion is detected by the Camera. The four methods available for selection are Period, Schedule, Motion, and GPIO Input, each of which can be set up with user scheduled recording time and duration, as well as defining the video record file target destination.

- Period: This method will trigger the Camera video surveillance/recording operation for a defined Time Lapse (in seconds) whenever motion is detected. The video record may be provided to host by E-mail/FTP, stored in the SD card, Remote Disk as selected or through all of them.


Event

Motion Detection
Video
Snapshot

Event Alarm Settings by Video

☒ Video Clip

Trigger by:
Period

Video Clip Type:

Post event recording:
5
Seconds


Time Lapse:
10
Seconds

Target to:

☐ E-mail / FTP
☐ SD card
☐ Remote Disk

Save

- Schedule:** This method activates the Camera video surveillance/recording operation continuously when the defined days of the week and set time of the set days are met. Motion is ignored with this method. Each recording time-span is in accordance with the setting value of Post event recording (in seconds) and the video record is stored in the SD card, Remote Disk as selected or through both of them.


Event

Motion Detection
Video
Snapshot

Event Alarm Settings by Video

☒ Video Clip

Trigger by:
Schedule

Day:

☒ Sun
☒ MON
☒ Tue
☒ WED
☒ Thu
☒ FRI
☒ Sat

Time:

Start
00
:
00
(hh:mm)
End
23
:
59
(hh:mm)

Video Clip Type:

Post event recording:
60
Seconds


Target to:

☐ SD card
☐ Remote Disk

Save

- **Motion:** This method will trigger the Camera video surveillance/recording operation whenever motion is detected within the defined days of the week and at the time of the set days.

Each recording time-span is in accordance with the total value of Pre-event recording and Post event recording (in seconds). And the video record may be provided to host by E-mail/FTP, stored in the SD card, Remote Disk as selected or through all of them.


Event

Motion Detection
Video
Snapshot

Event Alarm Settings by Video

☒ Video Clip

Trigger by:

Motion

[Link to Motion Settings](#)

☒ Only during

Day:

☒ Sun
☒ MON
☒ Tue
☒ WED
☒ Thu
☒ FRI
☒ Sat

Time:

Start

00

:

00

(hh:mm)
End

23

:

59

(hh:mm)

Video Clip Type:

Pre-event recording:

5

Seconds

Post event recording:

10


Seconds

Target to:

☐ E-mail / FTP
☐ SD card
☐ Remote Disk

Save

- **GPIO Input:** On the defined days of the week and at certain time of the set days, the Camera will trigger its GPIO Input Signal when its state changes. Each recording time-span is in accordance with the total value of Pre-event recording and Post event recording (in seconds). And the video record may be provided to host by E-mail/FTP, stored in the SD card, Remote Disk, activated GPIO Output Port or through all of them.


Event

Motion Detection

Video

Snapshot

Event Alarm Settings by Video

☒ Video Clip

Trigger by:

GPIO Input

Trigger Pattern:

Low to High

High to Low

State change

☒ Only during

Day:

☒ Sun
 ☒ MON
 ☒ Tue
 ☒ WED
 ☒ Thu
 ☒ FRI
 ☒ Sat

Time:

Start

00

:

00

(hh:mm)

End

23

:

59

(hh:mm)

Video Clip Type:

Pre-event recording:

5

Seconds

Post event recording:

5

Seconds

Target to:


☐ E-mail / FTP
 ☐ SD card
 ☐ Remote Disk
 ☐ GPIO Output

Save

3. Snapshot

The Snapshot tabbed pane sets the Camera to take snapshot images when motion is detected. The four methods available for selection are Always, Schedule, Motion, and GPIO Input, each of which can be set up with user scheduled recoding time and duration, as well as defining the video record file target destination.

- Always:** Under this method, the Camera automatically continuous to capture 6 snapshots of the area under surveillance at every 1 or 2 seconds interval. 3 previous snapshot frames are collected from the Camera buffer and 3 snapshot frames are captured live. The stream of accumulated snapshots may be sent to host by E-mail, FTP, stored in the SD card, Remote Disk as preferred or through all of them.


Event

Motion Detection
Video
Snapshot

Event Alarm Settings by Snapshot

☒ Snapshot

Trigger by: Always

Snapshot Type:

6 snapshot with

1
2

second interval (3 frames before and 3 frames after motion frame)


Target to:

☐ E-mail
☐ FTP
☐ Remote Disk

Save

6 snapshots are continuously collected at every 1 or 2 seconds interval.

- Schedule:** This method activates the Camera snapshot operation continuously when the defined days of the week and set time of the set days are met. The Camera will continuously capture 6 snapshots of the area under surveillance at every 1 or 2 seconds interval. 3 previous snapshot frames are collected from the Camera buffer and 3 snapshot frames are captured live. The stream of accumulated snapshots may be sent to host by E-mail, FTP, stored in the SD card, Remote Disk as preferred or through all of them.


Event

Motion Detection
Video
Snapshot

Event Alarm Settings by Snapshot

☒ Snapshot

Trigger by: Schedule

Day:

☒ Sun
☒ MON
☒ Tue
☒ WED
☒ Thu
☒ FRI
☒ Sat

Time:

Start 00 : 00 (hh:mm) End 23 : 59 (hh:mm)

Snapshot Type:

6 snapshot with

1


second interval (3 frames before and 3 frames after motion frame)

Target to:

☐ E-mail
☐ FTP
☐ Remote Disk

Save

- **Motion:** This method will trigger the Camera snapshot operation according to the set time interval (in seconds) whenever motion is detected within the defined days of the week and at the time of the set days. Single or 6 snapshots may be captured as defined. The stream of accumulated snapshots may be sent to host by E-mail, FTP, stored in the SD card, Remote Disk as preferred or through all of them.


Event

Motion Detection
Video
Snapshot

Event Alarm Settings by Snapshot

☒ Snapshot
Trigger by: Motion ▼ [Link to Motion Settings](#)
☒ Only during
Day: ☒ Sun ☒ MON ☒ Tue ☒ WED ☒ Thu ☒ FRI ☒ Sat
Time: Start 00 ▼ : 00 ▼ (hh:mm) End 23 ▼ : 59 ▼ (hh:mm)
Snapshot Type:
Interval: 3 (minimum is 3 seconds)
☐ Single snapshot
☒ 6 snapshot with 1 ▼ second interval (3 frames before and 3 frames after motion frame)
Target to:
☐ E-mail
☐ FTP
☐ SD card
☐ Remote Disk

User could select "Single" or "6 snapshot..."

Save

- **GPIO:** On the defined days of the week and at certain time of the set days, the Camera will trigger its GPIO Input Signal according to the set time interval (in seconds) when its state changes. Single or 6 snapshots may be captured at a time as defined.

The stream of accumulated snapshots may be sent to host through E-mail, FTP, stored in the SD card, Remote Disk, activated GPIO Output Port; per selection or through all of them. When selected, the setup dialog for these methods will display is illustrated in the following figure.

Target to:

☒ E-mail

Recipient E-mail Address:	<input type="text" value="rcpt@mail.com"/> (ex: rcpt@mail.com)
SMTP E-mail Server:	<input type="text" value="192.168.1.1"/> (ex: mail.examples.com or 192.168.1.1)
Port:	<input type="text" value="25"/> (0..65535)
User Name:	<input type="text" value="guest"/>
Password:	<input type="password" value="....."/>
Sender E-mail Address:	<input type="text" value="from@mail.com"/> (ex: from@mail.com)
Use SSL-TLS:	<div> None SSL-TLS STARTTLS </div>
<input type="button" value="Test E-mail"/>	

☒ FTP

FTP Server:	<input type="text" value="192.168.1.1"/> (ex: ftp.domain.com or 192.168.1.1)
FTP Server Port:	<input type="text" value="21"/> (0..65535)
User Name:	<input type="text" value="guest"/>
Password:	<input type="password" value="....."/>
Path:	<input type="text" value="\\ftpupload"/> (ex: \\ftp\\upload)
Filename Prefix:	<input type="text" value="event"/> (ex: event)
<input type="button" value="Test FTP"/>	


☐ SD card

※ As for the settings of SMTP Service, kindly please contact with your E-mail service provider . After you confirm all parameters are correct and working properly, you may enter them into the text area manually.

※ As for the settings of FTP Service, kindly please contact with your FTP service provider . While all parameters filled in Windows FTP Transferring Utility are correct and working properly under your Laptop or other PC, you may enter them into the text area manually.

5.5 Storage

1. Storage


Storage

Storage
Playback

SD card management

SD card status: OK

Total size:	30733648 KBytes	Free size:	22325440 KBytes
Used size:	8408208 KBytes	Use(%):	27 %

Recording status: Not Recording

SD card control:

☒ Enable cyclic storage

Keep Free Space: MB (30~500 MB)

Enable check box to allow auto-overwrite of earlier files in order to maintain the defined "Keep Free Space" memory size

Disk management

Status:

Total size:	0 KBytes	Free size:	0 KBytes
Used size:	0 KBytes	Use(%):	0 %

☐ Enabled

Type:

Remote Folder Path:

(ex: 192.168.1.1:/xxx)

User Name:

Password:

Enable check box to start Remote Disk Recording.

Clicking the "Storage" button will display the following tabbed panes to provide information on existing local storage, such as disk size info, type, and status. If recording is in progress when clicking the "Storage" button, a warning message will occur.

SD card management:


- : Click this button to save changes to the SD card control setting.
- : Click this button to format the SD memory card

- **Refresh**: Click this button to refresh the SD card information.

Disk management:

- **Type**: NFS and SMBFS two kind of Remote Server are provided.
- **Remote Folder Path**: If NFS Server type is selected, shared folder path will be filled in like "192.168.1.1:/xxx" syntax; if SMBFS Server type is selected, shared folder path will be filled in like "192.168.1.1/xxx" syntax.
- **User Name**: Fill in the username for authentication of Remote Server.
- **Password**: Fill in the password for authentication of Remote Server.
- **Save**: Click this button to save changes to the setting of Remote Server.
- **Refresh**: Click this button to refresh the server disk's information.

2. Playback:

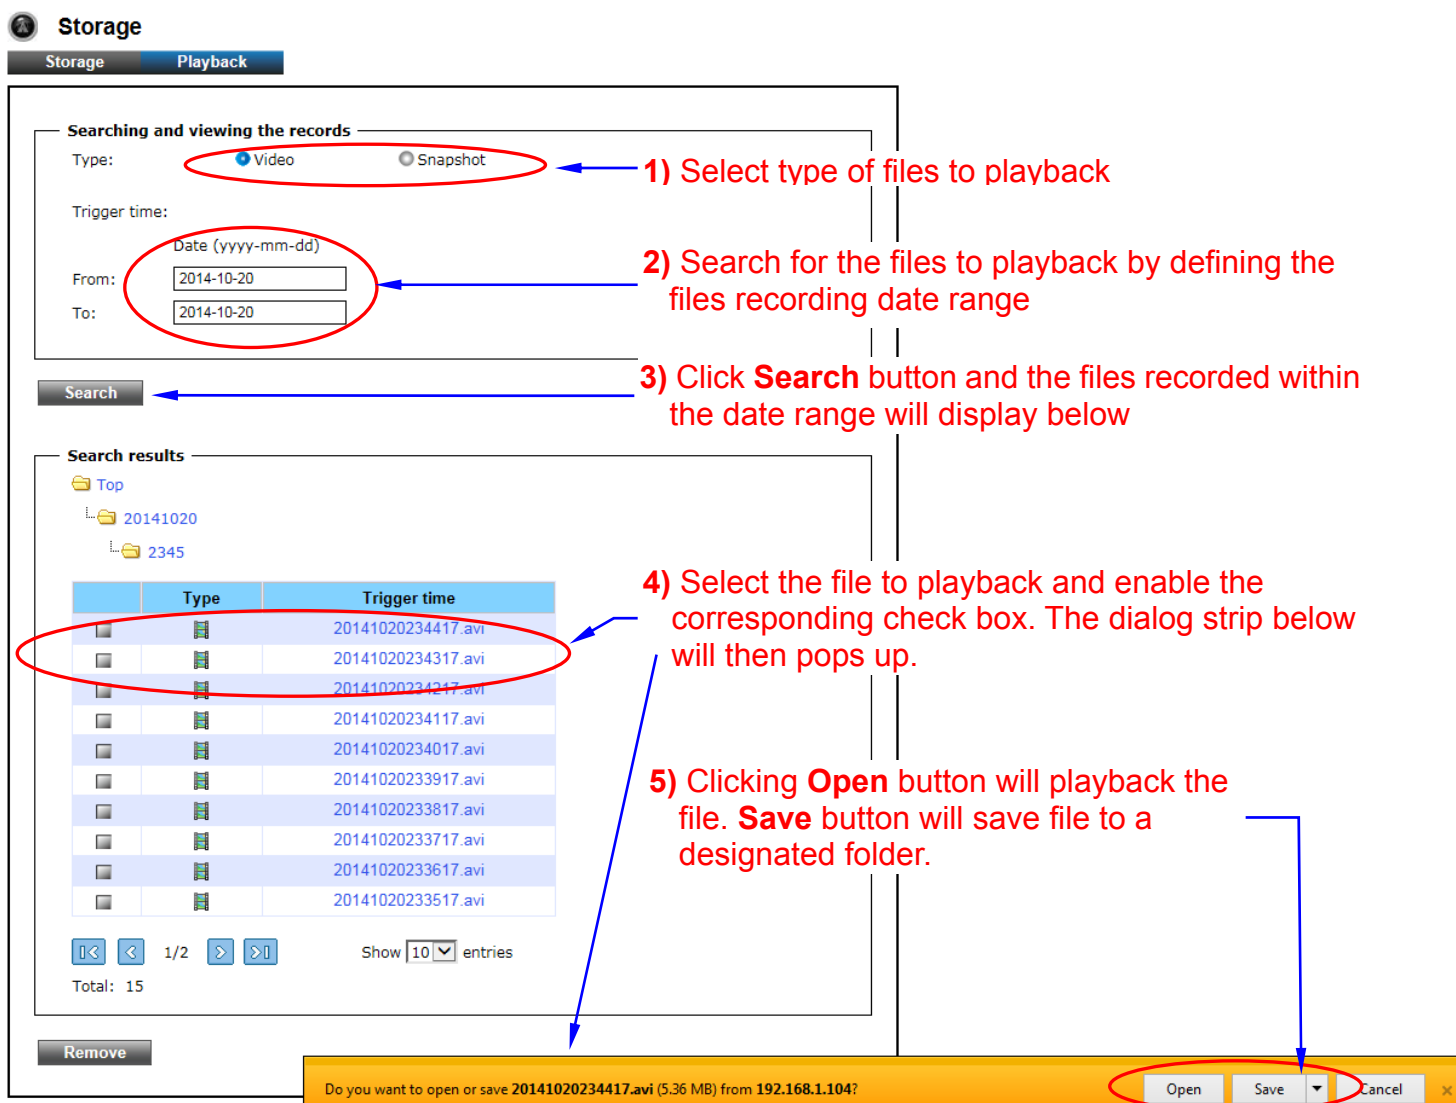

Storage **Playback**

Searching and viewing the records

Type: ☒ Video ☐ Snapshot

Trigger time: Date (yyyy-mm-dd)

From: 2014-10-20

To: 2014-10-20

Search

Search results

Top

20141020

2345

Type	Trigger time
<input checked="" type="checkbox"/>	20141020234417.avi
<input type="checkbox"/>	20141020234317.avi
<input type="checkbox"/>	20141020234217.avi
<input type="checkbox"/>	20141020234117.avi
<input type="checkbox"/>	20141020234017.avi
<input type="checkbox"/>	20141020233917.avi
<input type="checkbox"/>	20141020233817.avi
<input type="checkbox"/>	20141020233717.avi
<input type="checkbox"/>	20141020233617.avi
<input type="checkbox"/>	20141020233517.avi

1/2

Show 10 entries

Total: 15

Remove

Do you want to open or save 20141020234417.avi (5.36 MB) from 192.168.1.104?

Open **Save** **Cancel**

1) Select type of files to playback

2) Search for the files to playback by defining the files recording date range

3) Click **Search button and the files recorded within the date range will display below**

4) Select the file to playback and enable the corresponding check box. The dialog strip below will then pops up.

5) Clicking **Open button will playback the file. **Save** button will save file to a designated folder.**

5.6 System

1. Information




System

Information	Time	Account	Maintenance	System Log														
System Information <table border="1"> <tr> <td>Model Name:</td> <td>FE-501OD</td> </tr> <tr> <td>System Time:</td> <td>2014/10/27 14:28:42</td> </tr> <tr> <td>Firmware Version:</td> <td>A1.0.0_0916</td> </tr> <tr> <td>MAC Address:</td> <td>00:04:29:40:3A:01</td> </tr> <tr> <td>ActiveX control version:</td> <td>0.0.8.1</td> </tr> <tr> <td>Device ID (for DIPS):</td> <td>0424B75847 <input type="button" value="Test"/></td> </tr> </table>					Model Name:	FE-501OD	System Time:	2014/10/27 14:28:42	Firmware Version:	A1.0.0_0916	MAC Address:	00:04:29:40:3A:01	ActiveX control version:	0.0.8.1	Device ID (for DIPS):	0424B75847 <input type="button" value="Test"/>		
Model Name:	FE-501OD																	
System Time:	2014/10/27 14:28:42																	
Firmware Version:	A1.0.0_0916																	
MAC Address:	00:04:29:40:3A:01																	
ActiveX control version:	0.0.8.1																	
Device ID (for DIPS):	0424B75847 <input type="button" value="Test"/>																	
Wired network <table border="1"> <tr> <td>Status:</td> <td>Connected</td> </tr> <tr> <td>Mode:</td> <td>DHCP</td> </tr> <tr> <td>IP Address:</td> <td>192.168.1.133</td> </tr> <tr> <td>Subnet Mask:</td> <td>255.255.255.0</td> </tr> <tr> <td>Gateway:</td> <td>192.168.1.254</td> </tr> <tr> <td>Primary DNS:</td> <td>192.168.1.254</td> </tr> <tr> <td>Secondary DNS:</td> <td>0.0.0.0</td> </tr> </table>					Status:	Connected	Mode:	DHCP	IP Address:	192.168.1.133	Subnet Mask:	255.255.255.0	Gateway:	192.168.1.254	Primary DNS:	192.168.1.254	Secondary DNS:	0.0.0.0
Status:	Connected																	
Mode:	DHCP																	
IP Address:	192.168.1.133																	
Subnet Mask:	255.255.255.0																	
Gateway:	192.168.1.254																	
Primary DNS:	192.168.1.254																	
Secondary DNS:	0.0.0.0																	
DDNS Server <table border="1"> <tr> <td>Status:</td> <td>No connection</td> </tr> </table>					Status:	No connection												
Status:	No connection																	

The “Information” tabbed pane provides the existing system status of the Camera which includes Model Name, System Time, Firmware Version, MAC Address, ActiveX Control Version, Wired Network and DDNS Server Status.

2. Time


System

Information
Time
Account
Maintenance
System Log

System Time

2014/10/22 16:56:21

System Time settings

Time Zone:
GMT+08:00 Beijing, Chongqing, Hong Kong, Kuala Lumpur, Singapore, Taipei, Krasnoyarsk

☐ Automatic
NTP server: pool.ntp.org

☐ Keep current date and time
☒ Set Manually
☒ Synchronize with computer time
Date: 2014/10/22 Time: 16:56:24

☐ Assign value
☒ Enable Daylight Saving
Offset: +1 hrs

	Month	Week	Day of week	Hour	Minute
Start time	8	1	sunday	0	0
End time	10	1	sunday	0	0

Save


The “Time” tabbed pane is where you set up the clock of your Camera to synchronize with your local time.

- **System Time:** The Network Camera current date and time is applied and displayed here based on the setup status of the System Time Settings as detailed below.
- **Time Zone:** Select the applicable Time Zone of your city in reference to Greenwich Mean Time.
- **Automatic:** Select this item if you want to automatically synchronize the Camera clock with your manually entered Network Time Protocol (NTP) Server.
- **Keep current date and time setting:** Select this option in lieu of automatic synchronization if the Camera is not connected to NTP Server and uses its own embedded clock.

- Set manually:
Synchronize with the computer Time: Select this option to manually synchronize the Network Camera clock (date and time) with that of the local host computer.
Assign value: Select this option to enter the date and time manually.
- Enable Daylight Saving: Select this option only when applicable at your location. Two setup settings; the “Start time” and “End time” are needed to implement the feature.

Save : After setups are completed, click “Save” button to apply the settings.

3. Account

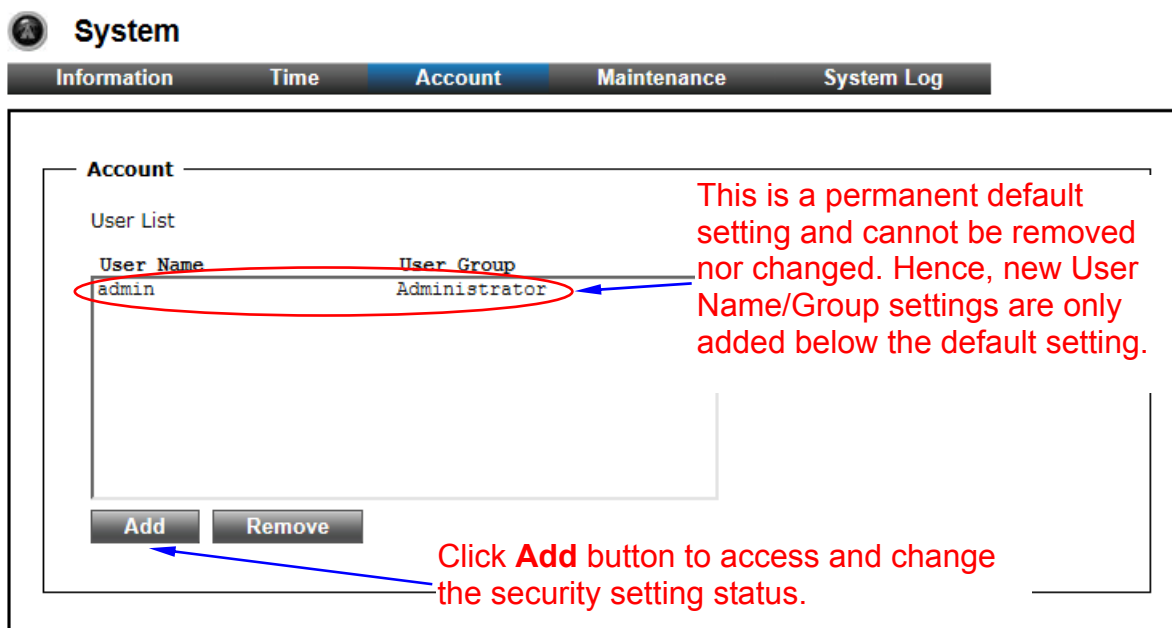

Account

User List

User Name	User Group
admin	Administrator

Add **Remove**

This is a permanent default setting and cannot be removed nor changed. Hence, new User Name/Group settings are only added below the default setting.

Click **Add** button to access and change the security setting status.

The “Account” tabbed pane allows you to add new Camera User Name and change Password and the surveillance status or User Group. Click the “Add” button to access the security setup dialog (shown below).

User Setup

User Name:

Password:

☒ Show Password

Confirm Password:

User Group:

☒ Administrator
 ☐ Operator
 ☐ Viewer

Note:

1. A user name and password must contain at least one character.

2. Max 14 characters are allowed in user names.

3. The first character in user name must be A-Z or a-z.

4. Only A-Z, a-z and 0-9 are allowed in the user name and password.

5. Max eight characters are allowed in the password.

6. The maximum number of users is 20.

7. The 'admin' user is default user and cannot be deleted.

Save

- **User Name:** Enter the new user name to be added into the list (see Note 4 of dialog for proper entry).
- **Password:** Enter the new password (see Note 4 of dialog for proper entry).
- **Confirm password:** Enter the password again for authentication (encoded display).
- **Show Password:** Displays the decoded password when check box is enabled.
- **User Group:** Three group options are available, namely:
Administrator: User is allowed to change Camera settings and perform all Camera functions.
Operator: User is allowed to login “Live View” Webpage and perform all functions within this page. Except changing Video and Audio settings of Camera live stream, other adjustments of Camera parameter are prohibited.
Viewer: User is only allowed to login “Live View” Webpage and perform all functions within this page. Changing Camera settings is prohibited.

Save

: After setups are completed, click “Save” button to apply the settings.

4. Maintenance

System

Information Time Account **Maintenance** System Log

Maintain Server

Reboot Factory Default

Upgrade Firmware

Model Name: FE-5010D

Firmware Version: A1.0.0_0916

Select firmware file:

Browse... Upgrade

Upload Own Logo File

Right click the mouse button on 'Logo Image' and then select Save As to save image in the PC.

Select image file to upload:

Browse... Upload

Backup

Save all parameters and user-defined scripts to a backup file. Backup

Upload Setting

Use a saved backup file to return the unit to a previous configuration.

Specify the backup file to use:

Browse... Restore


Download and save the latest firmware in the PC. Click here to browse and select it.

The “Maintenance” tabbed pane allows you to upgrade the firmware with the latest version and to restore the Network Camera settings to factory default.

- **Reboot System:** Clicking the “Reboot” button allows you to manually reboot the Network Camera.
- **Factory Default:** Clicking the “Factory Default” button will restore the Network Camera to its factory default settings status. Before Camera system proceed to restore step, there’ll be a dialog window popped and then ask if you would like to keep “Network setting” parameters. Besides, all configured data in the “System Time”, “Account” and “Maintenance” tab will be remained current.

- Upload Own Logo File: Prepare and save the Logo Image file in the PC, Then follow the below steps to replace Web UI Logo with it.
 - 1) Click the “Browse” button to access and select Logo Image file from PC.
 - 2) Click the “Upload” button to process Logo replacing. When upload process is completed, it’s strongly recommended to close and restart Web Browser.
- Upgrade Firmware: Download the latest firmware file from the website by executing the following steps:
 - 1) Click the “Browse” button to access and select the appropriate firmware file from its folder.
 - ✖ Please specify the correct firmware version mapped with your camera to upgrade, or there will be danger to damage camera system.
 - 2) Click the “Upgrade” button. The Network Camera will then start to upgrade the existing firmware. When upgrade is completed, the Camera will reboot automatically.
- Backup: Clicking the “Backup” button allows you to manually save Camera’s parameters and user settings into a “config_backup.tar.gz” file.
- Upload Setting: This function allows user to restore Camera’s backup setting by executing the below steps:
 - 1) Click the “Browse” button to access and select saved “config_backup.tar.gz” file from the PC.
 - 2) Click the “Restore” button to process Camera configuration restore.

5. System Log

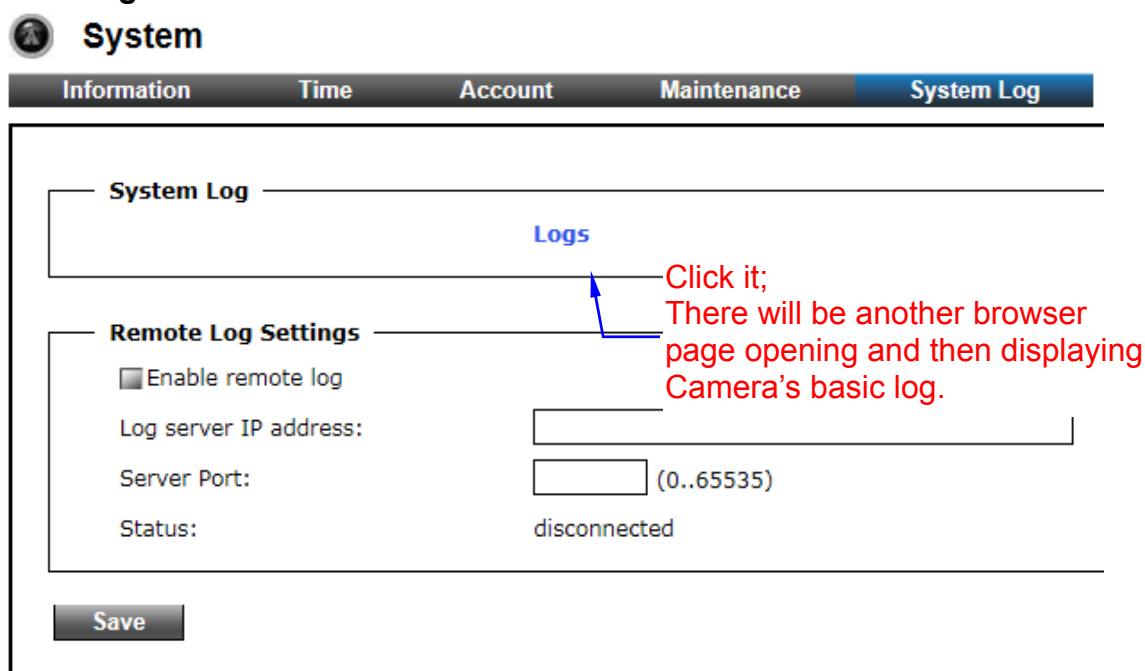

System

Information Time Account Maintenance **System Log**

System Log

Logs

Click it;
There will be another browser
page opening and then displaying
Camera's basic log.

Remote Log Settings

☐ Enable remote log

Log server IP address:

Server Port: (0..65535)

Status: disconnected

Save

The “System Log” tabbed pane allows you to see Camera’s basic log on another browser page or Remote Log Server.

- Remote Log Setting: Check “Enable remote log” selection first; and then manual entering IP address & port setting of Remote Log Server.

A rectangular button with a dark gray background and the word "Save" in white, sans-serif font.

: After setups are completed, click “Save” button to apply the settings.

6

Operating IP Camera via iOS/Android Device

6.1 Using IP Camera via iOS/Android Device

You can access into your IP camera via the iOS/Android device. Please follow the setup steps below.


1. Download **AirLive CamPro Mobile** from APP store/Google play
2. Execute the AirLive CamPro Mobile program



3. Click Setup button.



4. Setup page appears

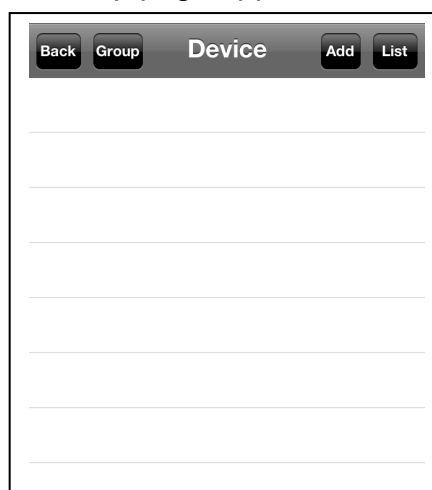

5. Click Add and Auto Search button.

Back Group Device Add List

Back Device Edit Save

Device ID

Query Auto Search

Name

Model

Address

HTTP Port

User Name

Password

6. Select the camera.

7. Edit the information and User Name/Password, click "Save".

Back Device Edit Save

Device ID

Query Auto Search

BU-3026-IVS - 192.168.0.147
BU-3028-IVS - 192.168.0.140
BU-720 - 192.168.0.91
FE-501OD - 192.168.0.202
FE-200CU - 192.168.0.182
MD-3025-IVS - 192.168.0.14
OD-2025HD - 192.168.0.114

Password

Back Device Edit Save

Device ID

Query Auto Search

Name

Model


Address

HTTP Port


User Name

Password

8. Click "Back".

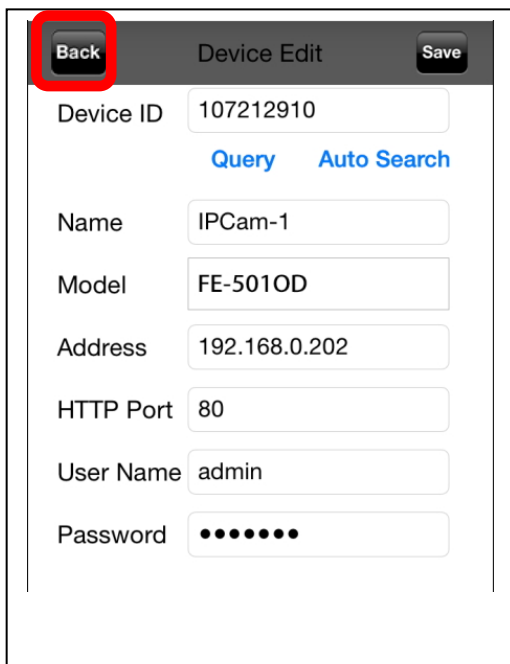


9. Select the camera.

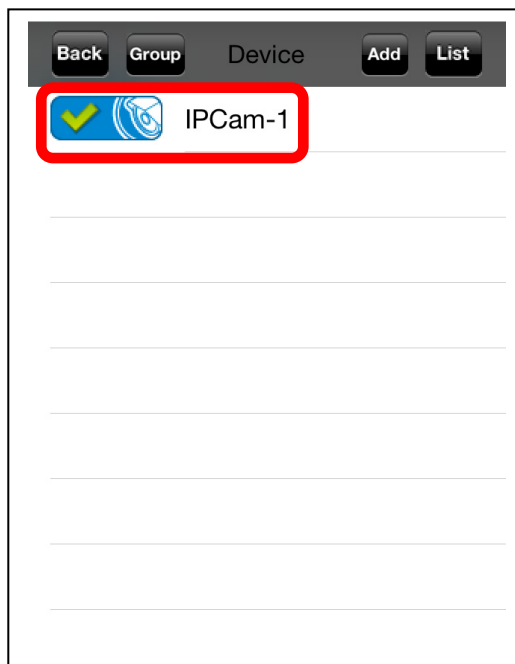

10. Select the channel to enlarge the video.



11. Camera live view.

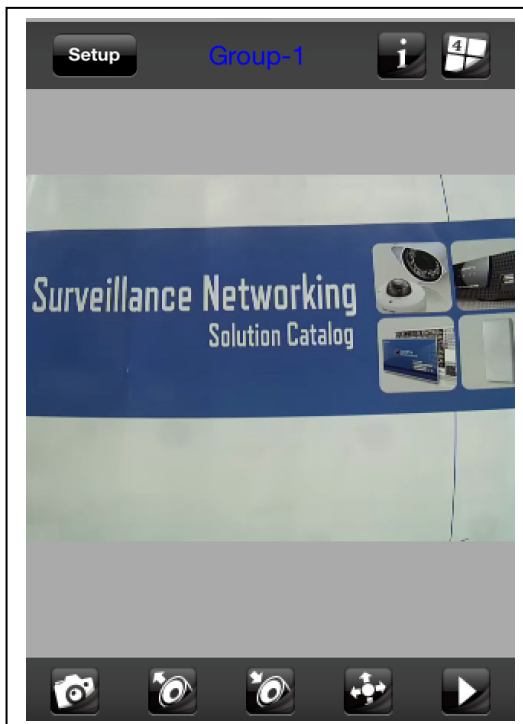

Note: The image is continuous snapshots, not video. Thus, live image can't be recorded here.