



3-Megapixel Motorized IR PoE IPCAM


BU-3128

- Motorized lens 2.8-12mm, F1.6, P-Iris
- 120dB WDR
- 40m IR range with Smart IR
- ROI (Region Of Interest)
- Two way audio (full duplex)
- IP66
- 802.3at PoE Port
- Micro SD/SDHC/SDXC card slot up to 128GB
- H.265 / H.264 / Motion JPEG



Motorized Lens

Built-in motorized zoom lens and focus allow users to adjust focal length remotely, minimizing installation and maintenance costs

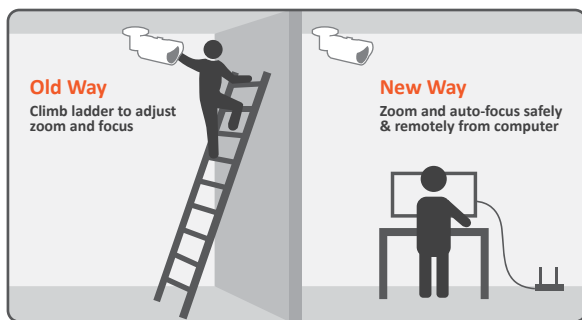

IP66

Complete protection from dust, oil, and other non-corrosive material. Protection from water, even from powerful jets of water. It can meet outdoor environment.



WDR

Cameras with WDR will take multiple exposures of the full scene and merge them together to provide an image that extends further than the human eye can perceive.



ROI

Defining a Region Of Interest will allow you to spend less bandwidth in areas that are less important while locating resolution on the most relevant areas.



H265 / H264

The camera support H265 and H264 compression technology. It provides lower bandwidth for longer duration of video recording



Specification

AirLive BU-3128

Camera	Camera Type	Bullet
	Image sensor	1/2.8" CMOS sensor (Sony IMX123)
	Lens	3MP Motorized Outdoor IR Motorized 2.8-12mm, F1.6, P-iris
	Horizontal view angle	96° - 35°
	IR working distance	40m effective range with Smart IR
	Minimum Illumination	0.01 lux @ F1.6 (color) 0.001 lux @ F1.6 (B/W)
	WDR	120dB
	Day/Night function	Mechanical IR cut filter, Light sensor
Video	Resolutions and Frame Rate	2048x1536 @30fps 1920x1080@30fps 1280x720@30fps 640x480@30fps 640x360@30fps 320x240@30fps
	Video compression	H.265/H.264/Motion JPEG
	Image settings	Rotation: mirror, flip, mirror flip Brightness, contrast, saturation, sharpness Overlay capabilities: Time stamp , Title and privacy Image ROI; 3D DNR; Defog
	Audio support	Two-way audio (full duplex)
	Audio compression	G.711 u-law, a-law, G.726, AMR
I/O & Connector	Ethernet	RJ-45 Ethernet 10/100 Base-T
	Power Supply	PoE(Power over Ethernet) built-in IEEE 802.3af Power consumption: Max 7.2W Option: DC Jack, 12V DC, 1A
	Alarm I/O	DIDO 2 alarm in ; 1 alarm out
	Audio connector	RCA (1 Line in, 1 Line out)
	Edge storage	Micro SD/SDHC/SDXC up to 128GB
	Buttons	Reset push button
	Alarm & Event	Event type
	Alarm action	Network storage, edge storage, FTP, SMTP, HTTP event, HTTPS.
Network	Users	10 simultaneous users
	Security	Multiple user access levels with password protection, HTTPS encryption
	Supported protocols	IPv6, Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP
	ONVIF	2.4 Profile S
General	Housing	Aluminum Alloy
	Ingress Protection	IP66 rated weatherproof housing
	Operating conditions	Starting temperature: -10 ~ 60°C Humidity 10-100% RH Working temperature: -30~ 60°C Humidity 10-100% RH
	Dimensions	φ96 x 263mm, include. bracket
	Weight	750g exclude power supply
	Certification	CE, FCC, RoHS

Ordering Information:

AirLive BU-3128 3-Megapixel Motorized IR PoE IPCAM