



# Topology

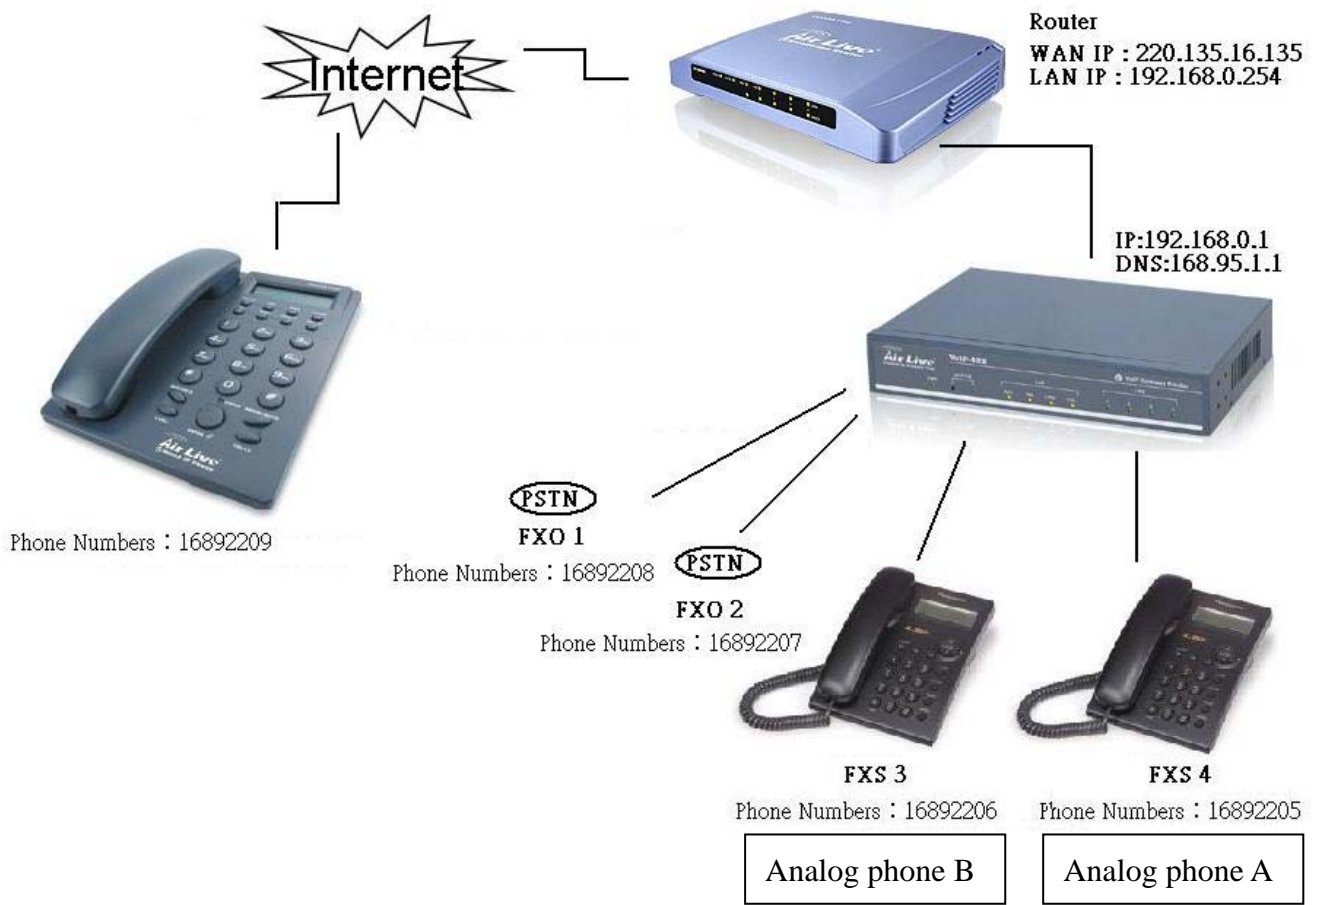

# SIP Setting Guide of VoIP-422

In the beginning, you should login WebUI of VoIP-422. Please enter “192.168.0.1” into address box of browser. When below screen shows, please type “eitg” as username, and “123” as password.

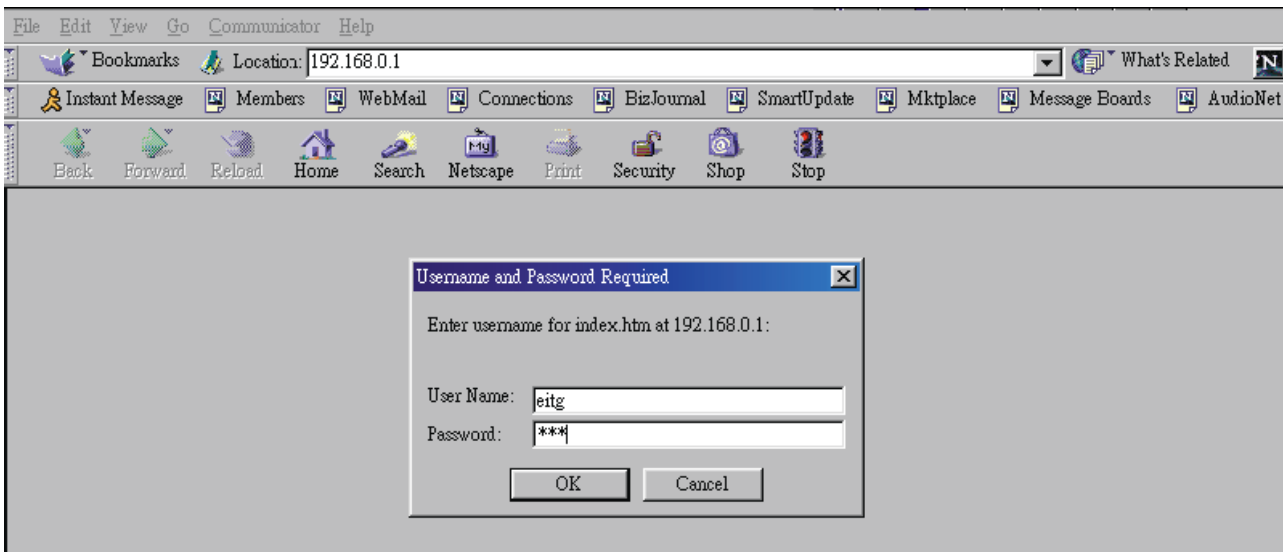


## A. Setting IP address of Voip-422

Please go to [Configure System Settings](#) → [ITG IP Settings](#)


The following is the configuration of VoIP-422, the subnet is based on subnet of router

1. Set your VOIP IP Address:192.168.0.1
2. Subnet Mask:255.255.255.0
3. Default IP Gateway Address:192.168.0.254

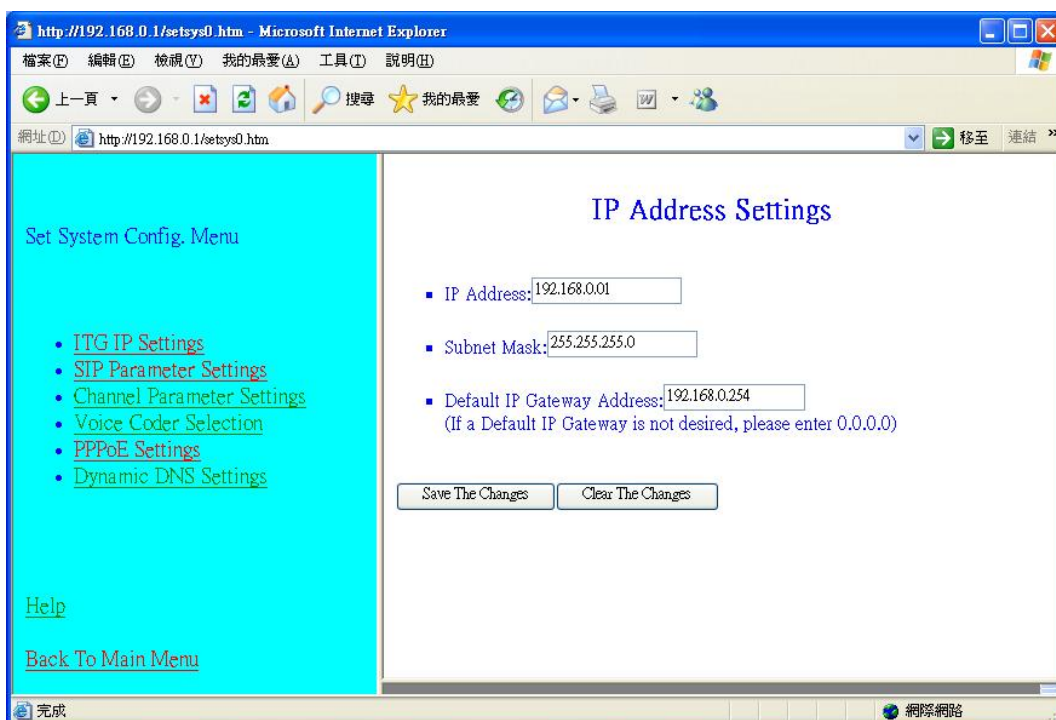

## B. Configure DNS

Please go to [Configure System Settings](#) → [SIP Parameter Settings](#) → [Domain Name service Setting](#)

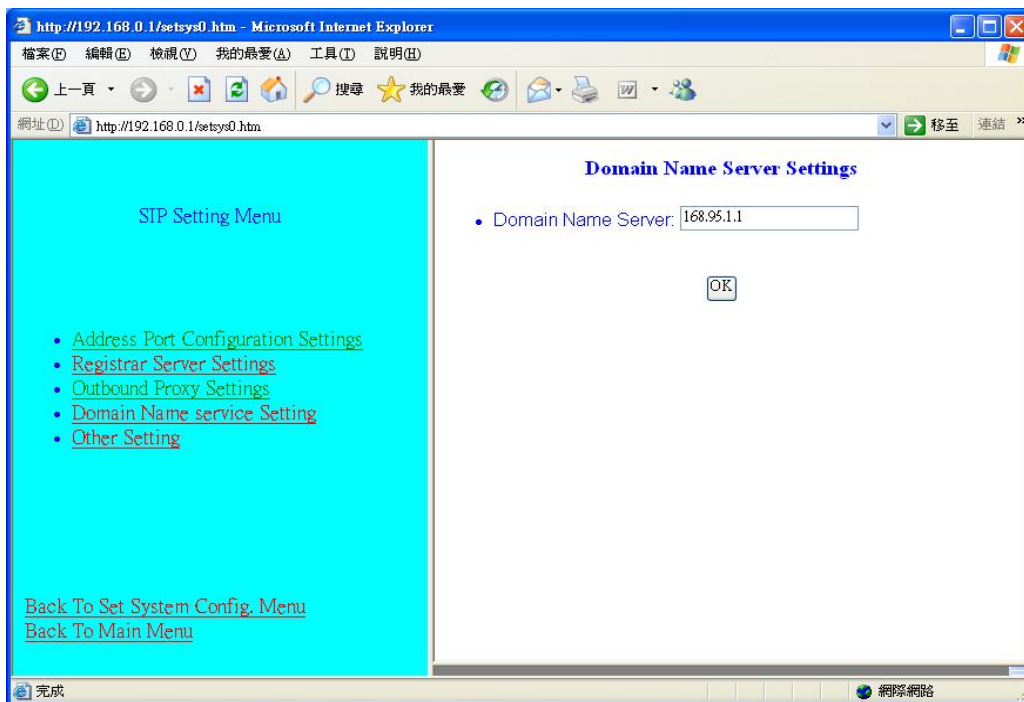


## C. Set up SIP accounts

Please go to [Configure System Settings](#) → [SIP Parameter Settings](#) → [Registrar Server Settings](#)

Configure SIP account of Analog phone A

1. Local Phone Numbers :16892205
2. GW port :4 (Notice: please do not forget to tick the option)

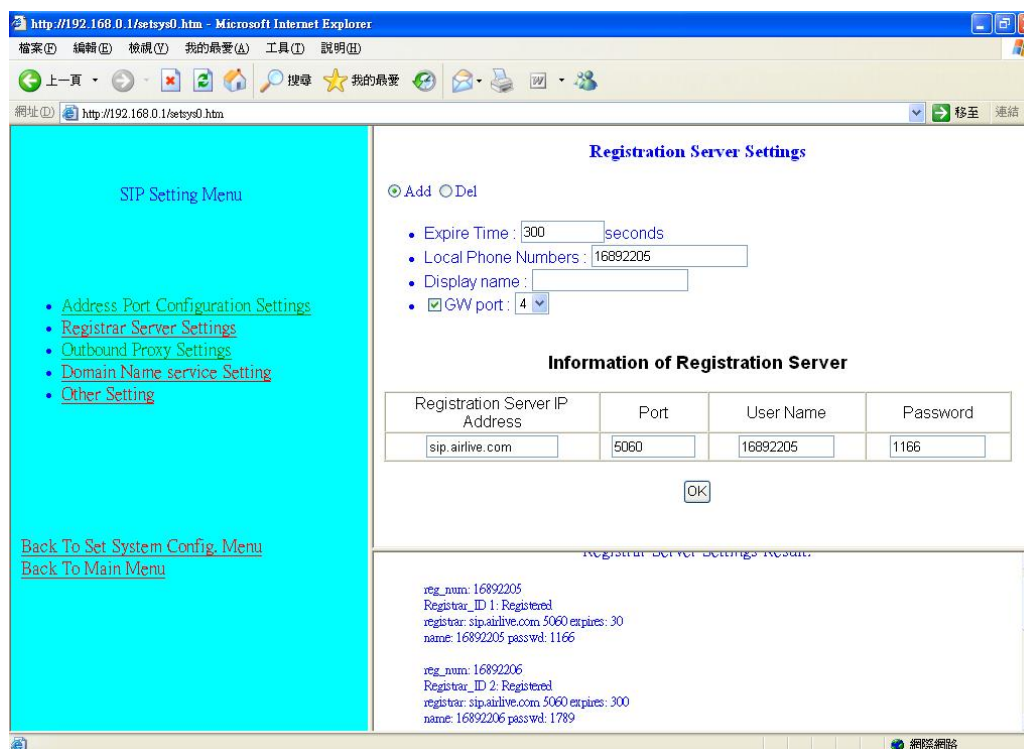


## D. Configure your dial plan

Please go to [Dial Plan Settings](#) → [Phone/Hunt Group/Destination Settings](#)  
In Analog phone A

1. Phone : 16892205
2. Hunt Group ID: 4


( Because we plug analog phone A into port 4 of VoIP-422 in part B, the hunt group ID would be the same with 4 )

3. Min. Digits : 1
4. Max. Digits : 8
5. Strip : 8

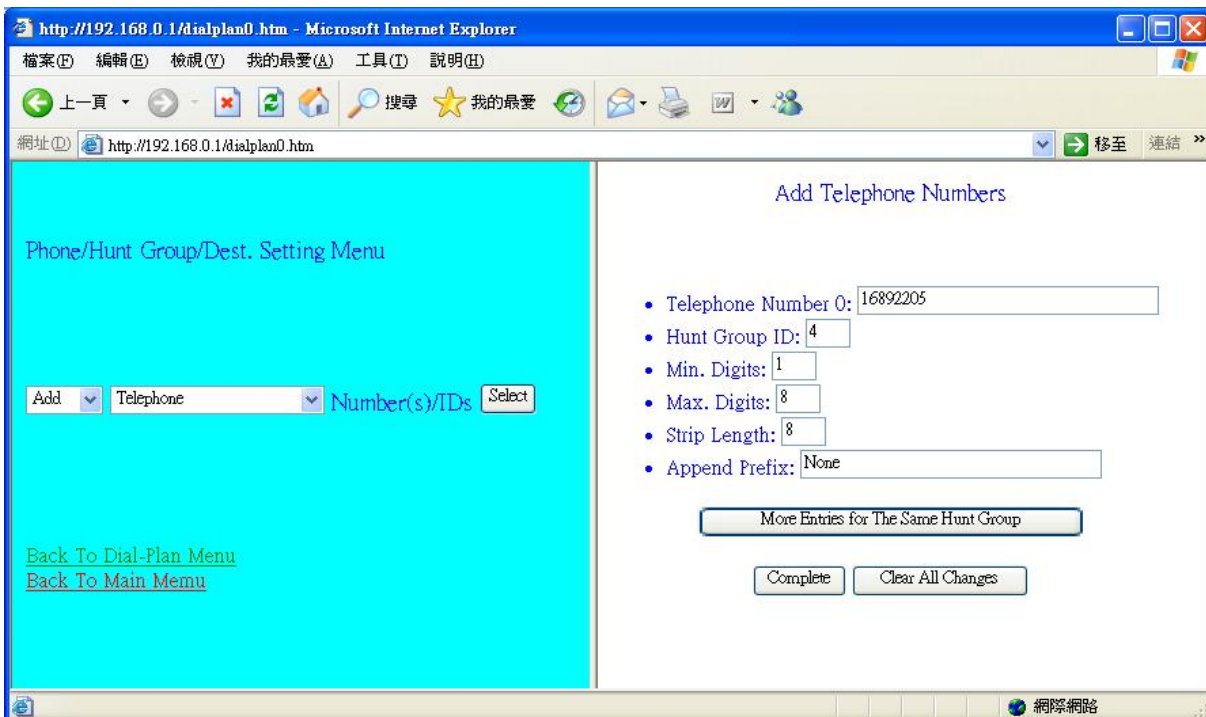

Setting of analog phone B is the same with above instruction

This figure show your list of phone numbers

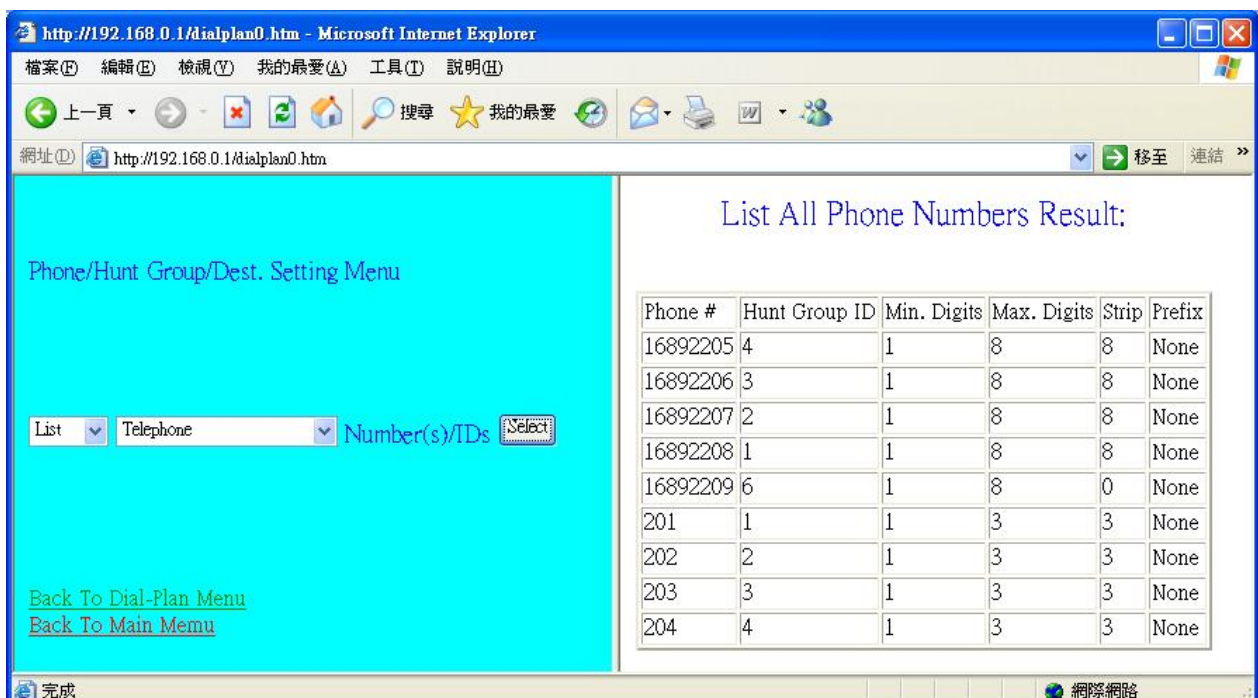

## E. Configure your remote IP phone

1. Phone : 16892209
2. Hunt Group ID : 6
3. Min. Digits : 1
4. Max. Digits : 8
5. Strip : 0

http://192.168.0.1/dialplan0.htm - Microsoft Internet Explorer

檔案(F) 編輯(E) 檢視(V) 我的最愛(A) 工具(T) 說明(H)

上一頁 後一頁 刷新 主页 搜索 我的最愛 打印 收藏夹 帮助

網址(D) http://192.168.0.1/dialplan0.htm 移至 連結 >>

Phone/Hunt Group/Dest. Setting Menu

Add Telephone Number(s)/IDs Select

[Back To Dial-Plan Menu](#)  
[Back To Main Memu](#)

### Add Telephone Numbers

- Telephone Number 0: 16892209
- Hunt Group ID: 6
- Min. Digits: 1
- Max. Digits: 8
- Strip Length: 0
- Append Prefix: None

More Entries for The Same Hunt Group

Complete Clear All Changes

網際網路

## Add hunt group ID into remote IP phone

http://192.168.0.1/dialplan0.htm - Microsoft Internet Explorer

檔案(F) 編輯(E) 檢視(V) 我的最愛(A) 工具(T) 說明(H)

上一頁 後一頁 刷新 主页 搜索 我的最愛 打印 收藏夹 帮助

網址(D) http://192.168.0.1/dialplan0.htm 移至 連結 >>

Phone/Hunt Group/Dest. Setting Menu

Add HuntGroup Number(s)/IDs Select

[Back To Dial-Plan Menu](#)  
[Back To Main Memu](#)

### Add Hunt Group IDs

- Hunt Group ID: 6
- Destination ID 0: 6

More Destinations for The Same Hunt Group

Complete Clear All Changes

完成 網際網路



## Set up remote destination ID for your remote IP phone

http://192.168.0.1/dialplan0.htm - Microsoft Internet Explorer

檔案(F) 編輯(E) 檢視(V) 我的最愛(A) 工具(T) 說明(H)

← 上一頁 → 搜尋 我的最愛

網址(D) http://192.168.0.1/dialplan0.htm 移至 連結 >>

### Phone/Hunt Group/Dest. Setting Menu

Add Remote\_Destination\_IP

Number(s)/IDs

[Back To Dial-Plan Menu](#)  
[Back To Main Memu](#)

### Add Remote Destination ID

- Destination ID:
- IP Address:  or  
Host Name:
- Note: if both IP Address and Host Name are defined, only IP Address will be recognized.*
- Port:
- Company/Location:

完成 網際網路