


How to Configure WDS

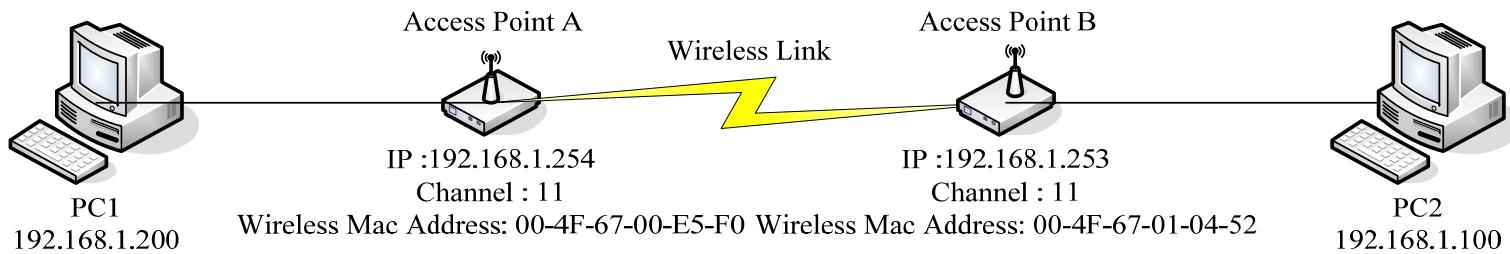

Access Point A Setting

Access Point A

IP: 192.168.1.254

Channel: 11

Wireless Mac Address:

00-4F-67-00-E5-F0

1. Please find your Wireless MAC address information in the system status

Air Live® Quick Setup Status

System Status

Item	WAN Status	Side note
Remaining Lease Time	00:00:00	Reconfiguring...
IP Address	0.0.0	
Subnet Mask	0.0.0	
Gateway	0.0.0	Unreachable
Domain Name Server	0.0.0	

Statistics of WAN

	Inbound	Outbound
Octets	0	7872
Unicast Packets	0	0
Non-unicast Packets	0	24

Item Setting

Wireless MAC Address	00-4F-67-00-E5-F0
Network ID(SSID)	airlive
Channel	11
Security Type	None
DDNS Provider	DynDNS.org(Dynamic)

2. Change wireless channel and click WDS setting button

Wireless Setting

Item	Setting
Wireless	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Network ID(SSID)	airlive
SSID broadcast	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Channel	11
Security	None

Save Undo **WDS Setting...** MAC Address Control... Help

3. Enable WDS function and insert Access Point B wireless MAC Address into access point A WDS setting.

WDS Setting

Item	Setting
Wireless Bridging	<input type="radio"/> Disable <input checked="" type="radio"/> Enable
Remote AP MAC	00-4F-67-01-04-52

Save Undo Help

4. Please save and reboot AP A

WDS Setting

Item	Setting
Wireless Bridging	<input type="radio"/> Disable <input checked="" type="radio"/> Enable
Remote AP MAC	00-4F-67-01-04-52

Save Undo Help **Reboot**

Saved! The change doesn't take effect until router is rebooted!

Access Point B Setting

Access Point B

IP: 192.168.1.253

Channel: 11

Wireless Mac Address:

00-4F-67-01-04-52

1. Please find your Wireless MAC address information in the system status

AirLive WT-2000R Wireless Broadband Router Web-Console - Microsoft Internet Explorer

System Status

Item	WAN Status	SideNote
Remaining Lease Time	00:00:00	Reconfiguring...
IP Address	0.0.0	
Subnet Mask	0.0.0.0	
Gateway	0.0.0.0	
Domain Name Server	0.0.0.0	

Statistics of WAN	Inbound	Outbound
Octets	0	656
Unicast Packets	0	0
Non-unicast Packets	0	2

Item	Setting
Wireless MAC Address	00-4F-67-01-04-52
Network ID(SSID)	airlive
Channel	11
Security Type	None
DDNS Provider	DynDNS.org(Dynamic)

2. Change wireless channel and click WDS setting button


AirLive WT-2000R Wireless Broadband Router Web-Console - Microsoft Internet Explorer

Wireless Setting

Item	Setting
Wireless	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Network ID(SSID)	airlive
SSID broadcast	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Channel	11
Security	None

Save Undo **WDS Setting...** MAC Address Control... Help

3. Enable WDS function and insert AP A wireless MAC Address into AP B WDS setting.

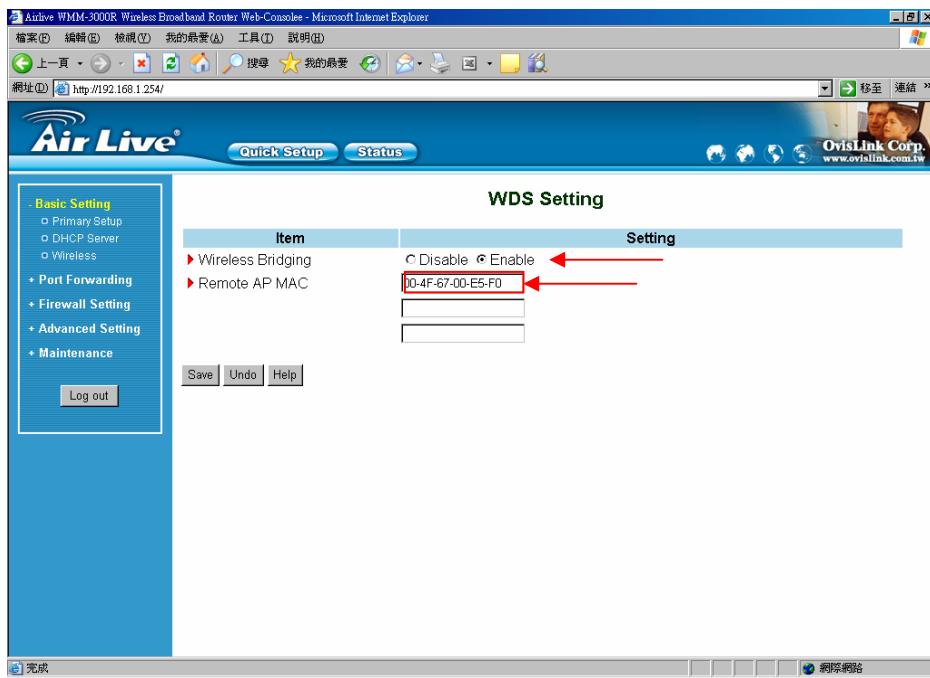

4. Please save and reboot AP B

