



- Please refer the steps to set wireless network card as Software AP:
1. Please open the utility of wireless network card, and choose the “Set Wizard” function.

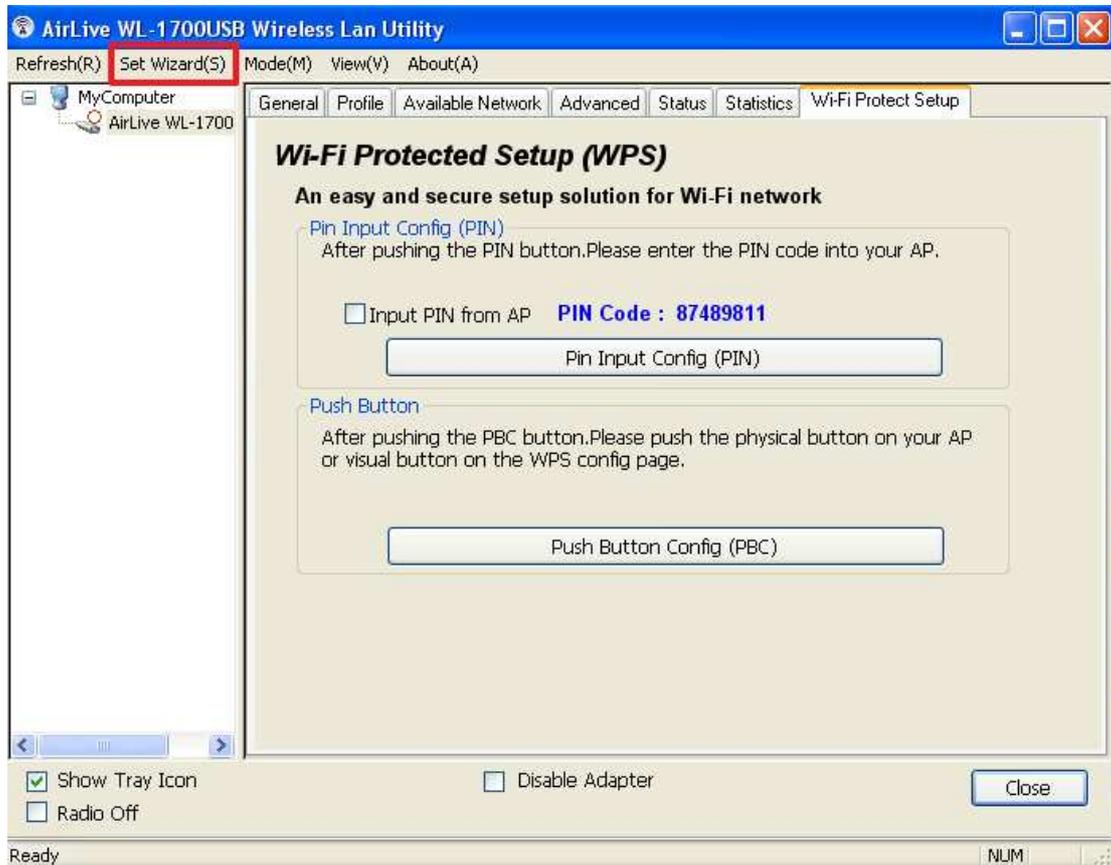

2. Please choose “AP: Setup Access Point wireless network”, and click the “Next” button.

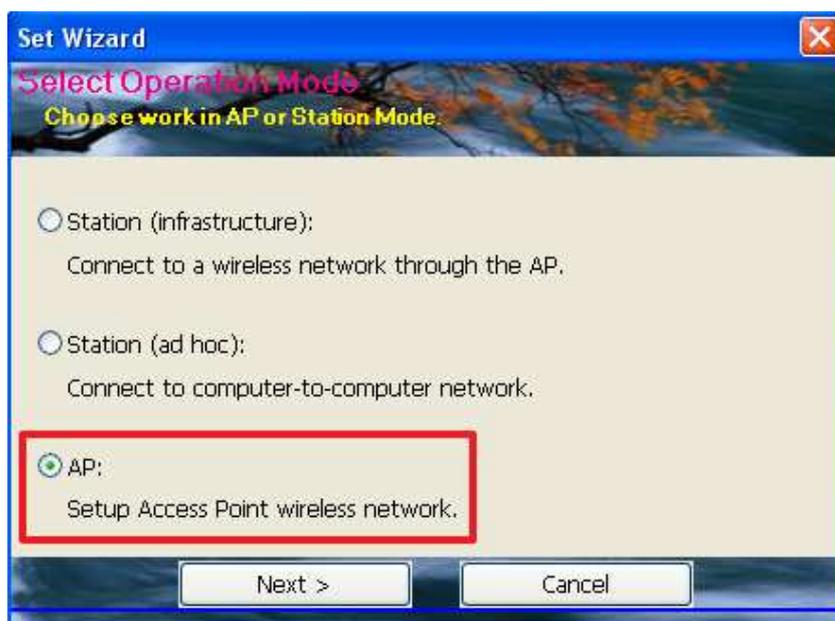


3. Please choose “Normal User: Least setting”, and click the “Next” button.




4. Please set the SSID and Encryption.


In this case, we set the SSID as `airlive_AP` and the Encryption as AES.

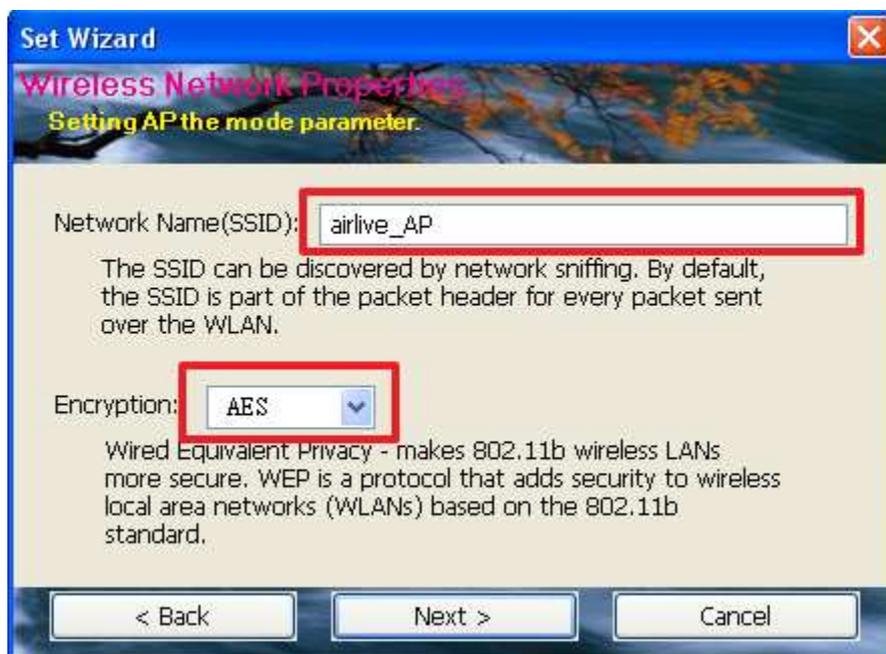


5. Please set the key of Encryption, the length is 8-63 bits.

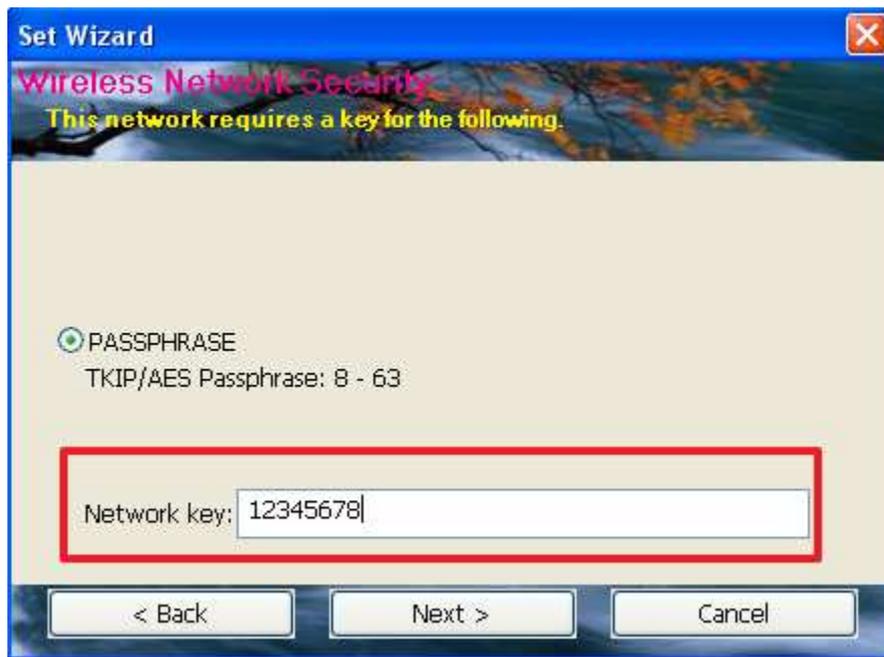

6. The page will show the settings of SSID and key.
Please click the "Next" button.

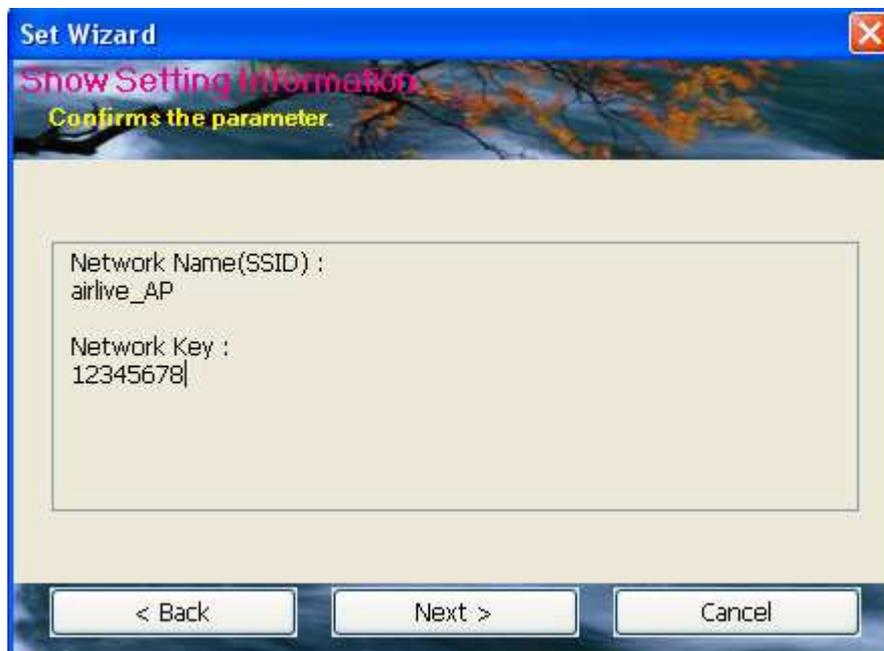

7. Please select the Internet connection from the list and click the “Next” button.

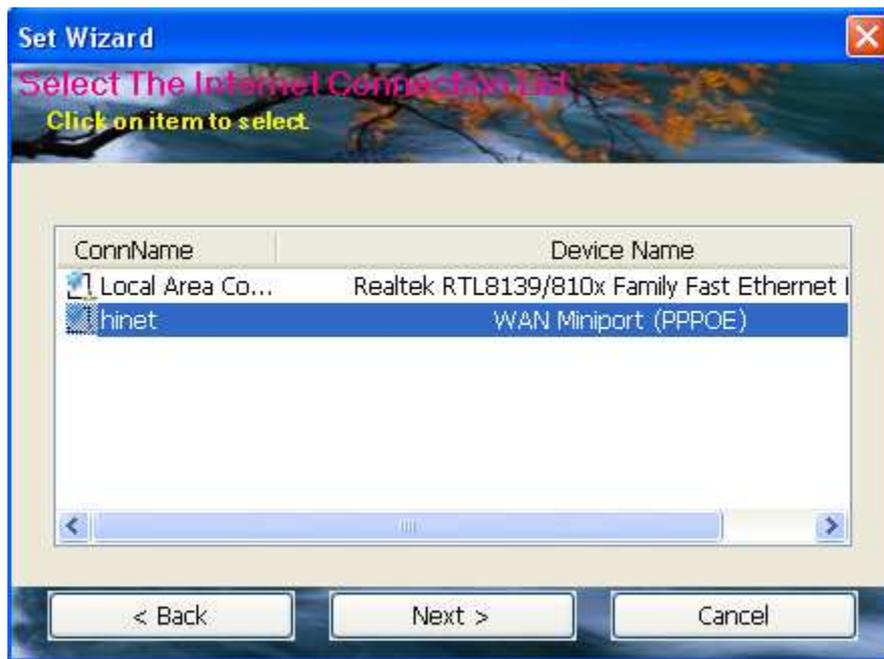


8. The page will show the settings of SSID and key and the internet connection. Please click the “Finish” button.




9. Now, we have finished all settings of wireless network card. It could send wireless signal and share internet connection to wireless client.

- For Client side, we will show the steps about connecting the laptop to WL-1700USB:


1. Please use “the Refresh network list” function to search the wireless network. Then please choose the SSID of WL-1700USB and click the “Connect” button.

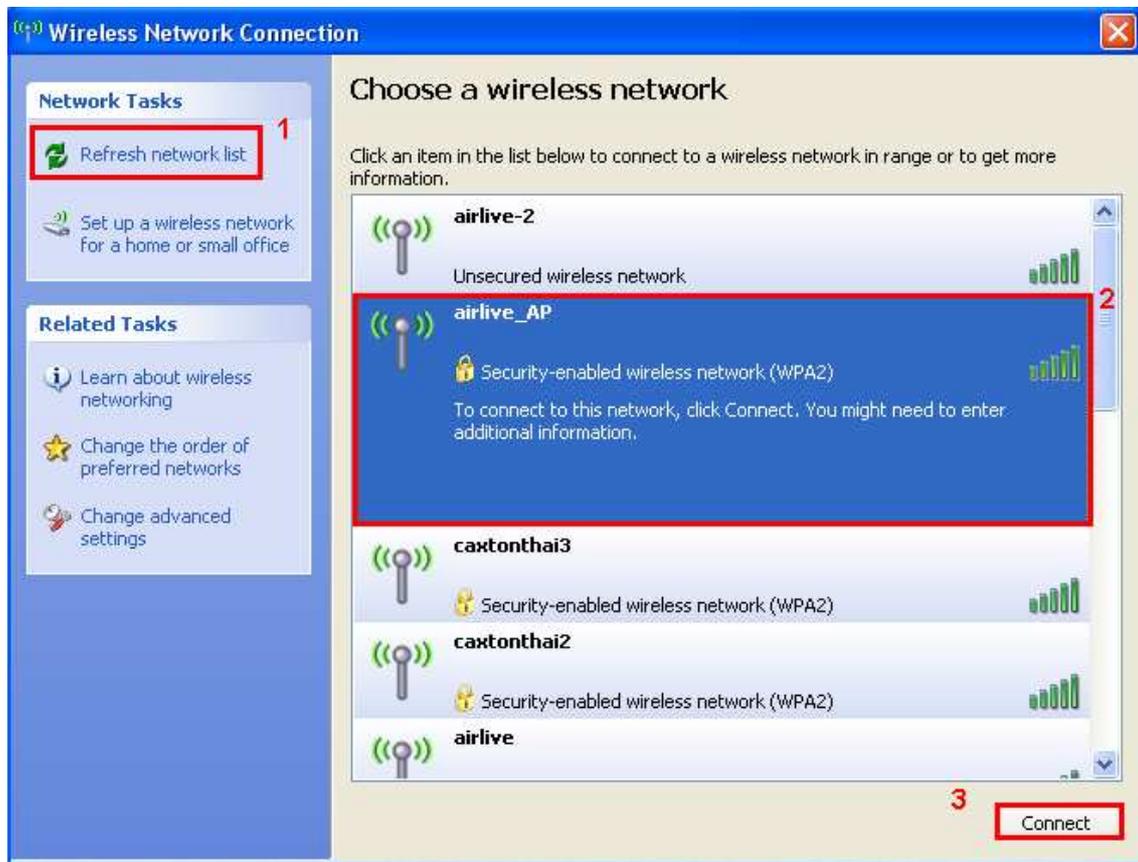


2. Please input the key of encryption.

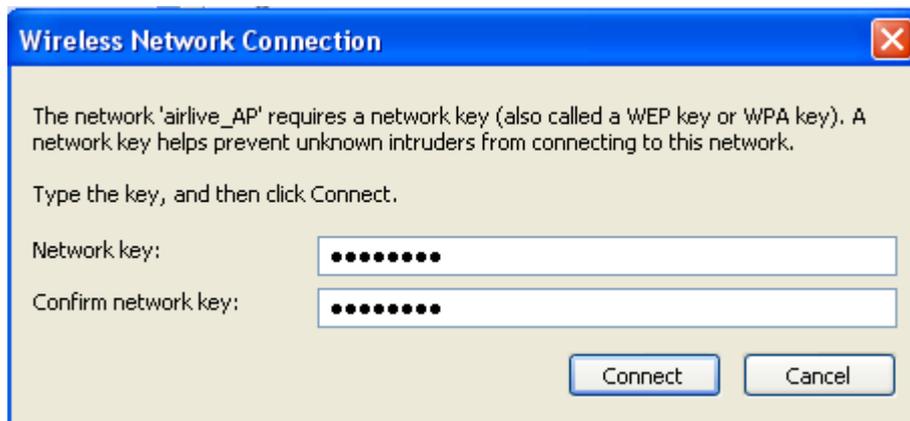

3. Then the connection will be established.

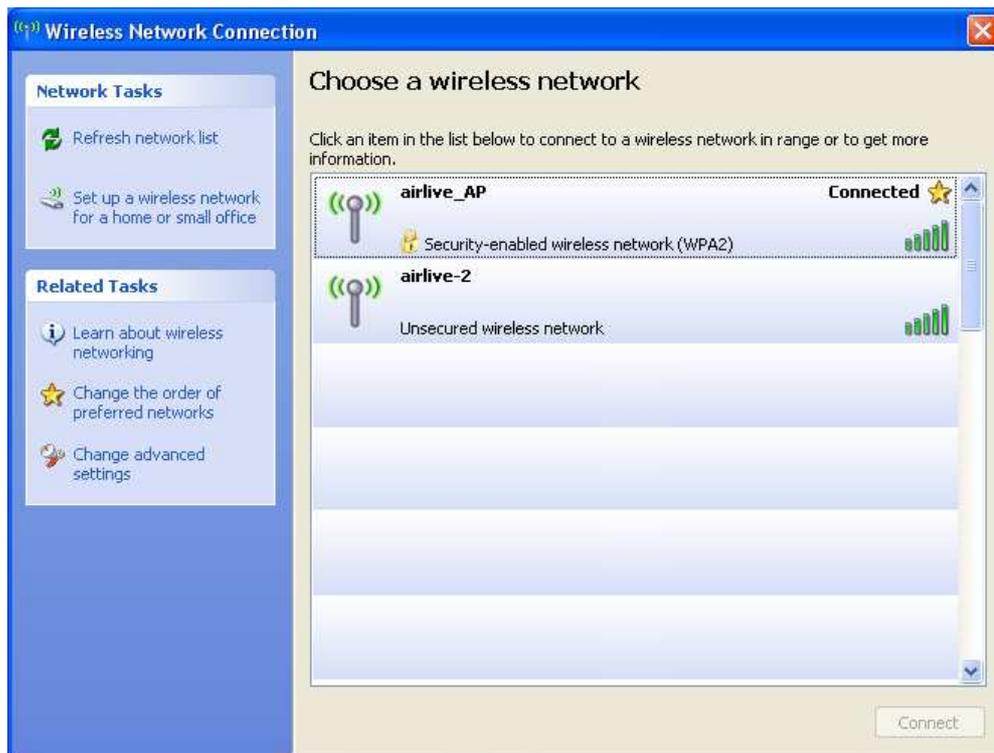

4. After establishing the connection, please set the laptop's IP address as "Obtain an IP address Automatically" and set DNS Server as "Obtain DNS Server address Automatically".

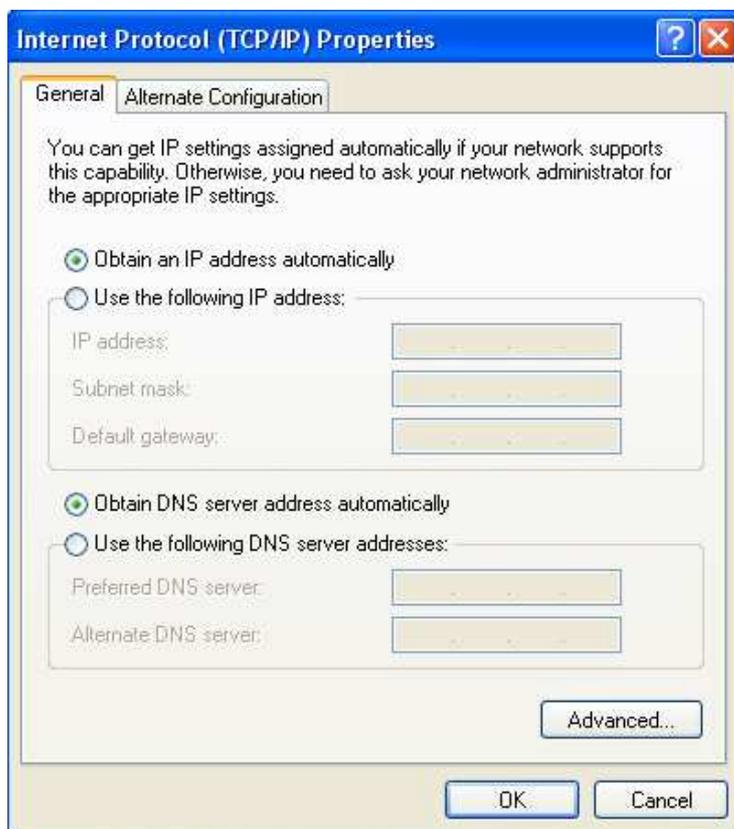

5. Then the laptop will get IP address from WL-1700USB, and also get internet access successfully.

The screenshot displays the AirLive website interface. At the top left is the AirLive logo. A navigation menu includes links for Company, Products, Support, Press, Event, Member, and Contact us. A banner at the top right features a family photo and the text "Powered by OvisLink Corp.". The main content area is divided into several sections:

- Invitation to ENMA EXPO INDIA 2011:** August 25th - 27th, 2011, Hall 3, Booth# Z1985.
- Press:** Includes "Press Reviews" (e.g., "Product Review: AirLive N. Power - Wireless N PoE AP Router on Jagatreview, Indonesia") and "Awards" (e.g., "World's smallest 11n 300Mbps router AirLive N.MINI gained award Innovation on Hardwarebase.net").
- Air3GII Smartphone Tethering:** A central banner showing HTC, iPhone, Samsung, and N95 smartphones connected to an AirLive device. Below it, a "New Product" section lists "POE-2600HD" (2 Megapixel PoE WebTV PoE IP Cam) and "A.DUO" (Concurrent Dual Band PoE AP).
- Driver & Firmware:** A search box for "Product Name" and a list of firmware updates for NVR16, NVR8, NVR4, and N.MINI.
- Support News:** A section for "Air3GII".