


WT-2000R and (WN-200R, WN-300R, WN-301R) with Universal repeater Mode

1. Open WT-2000R wireless setting page.
2. Setting SSID, channel, security and key.

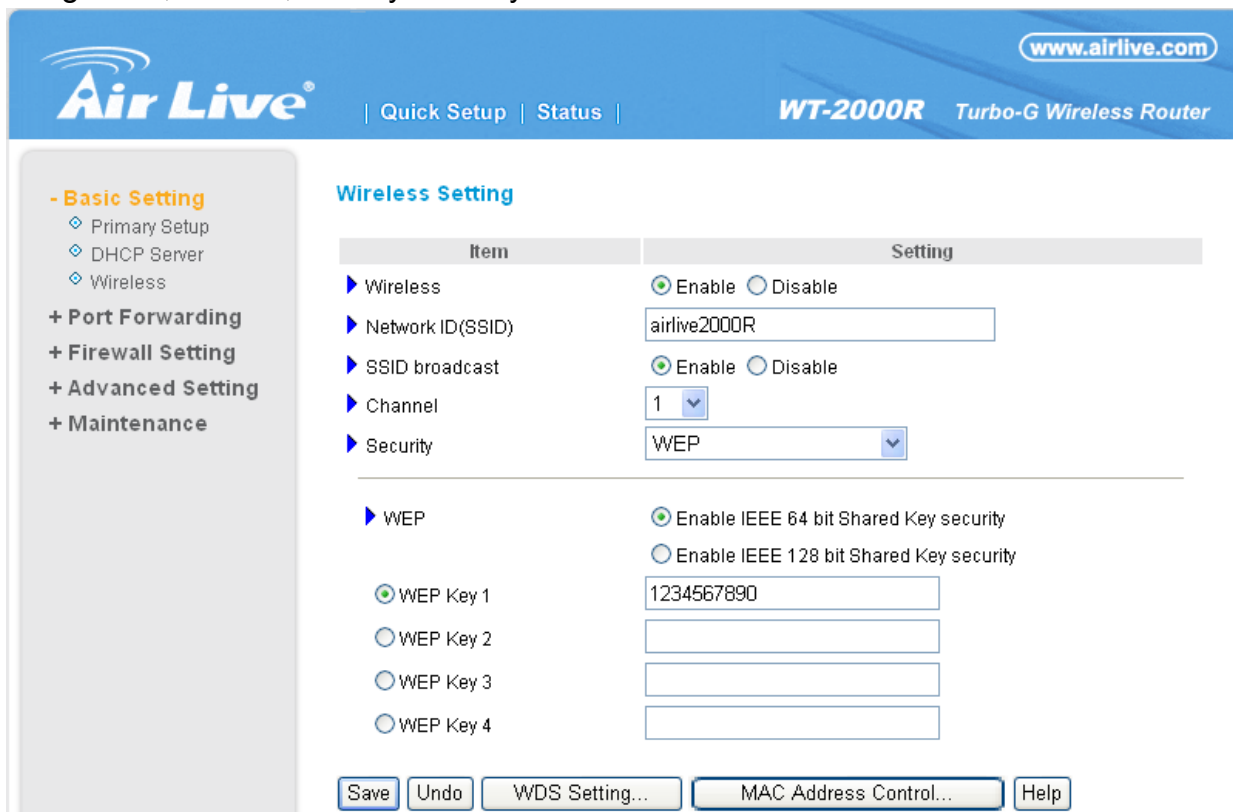

The screenshot shows the Air Live WT-2000R web interface. The top navigation bar includes the Air Live logo, a link to www.airlive.com, and tabs for Quick Setup, Status, and Wireless Setting. The left sidebar contains a menu with Basic Setting (selected), Port Forwarding, Firewall Setting, Advanced Setting, and Maintenance. The main content area is titled 'Wireless Setting' and contains a table with the following items and settings:

Item	Setting
Wireless	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Network ID (SSID)	airlive2000R
SSID broadcast	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Channel	1
Security	WEP
WEP	
	<input checked="" type="radio"/> Enable IEEE 64 bit Shared Key security <input type="radio"/> Enable IEEE 128 bit Shared Key security
<input checked="" type="radio"/> WEP Key 1	1234567890
<input type="radio"/> WEP Key 2	
<input type="radio"/> WEP Key 3	
<input type="radio"/> WEP Key 4	

At the bottom of the page, there are buttons for Save, Undo, WDS Setting..., MAC Address Control..., and Help.

3. Save and reboot WT-2000R.

4. Open WN-200R Wireless-Options setting page.
5. Setup channel, **channel must be the same with WT-2000R.**

Options

Region	Region:	Europe ▼
Options	802.11 Mode:	11b+g+n ▼
	Channel NO.	01 ▼
	Extension Channel.	Up channel ▼
	<input checked="" type="checkbox"/> Isolation Between SSID	
	<input checked="" type="checkbox"/> WMM support	
	Bandwidth:	20MHZ + 40MHZ auto ▼
<div>Save Cancel Help</div>		

6. Open WN-200R Wireless-Mode setting page.
7. Select Universal Repeater mode.
8. Enter the ssid of WT-2000R to the “AP Client SSID” column.

Mode

Wireless Mode	Mode :	Universal Repeater ▼
	SSID1 (Service Set Identifier)	airlive
	<input checked="" type="checkbox"/> Broadcast SSID	
	<input checked="" type="checkbox"/> Isolation Within SSID	
	Security Setting:	
	SSID1 :Disabled	Configure SSID1
	AP Client SSID :	airlive2000R
	Security Setting:	
	WEP	Security Setting
<div>Save Cancel Help</div>		

9. Setup Security Setting, **Security must be the same with WT-2000R .**
10. Save and reboot WN-200R

Wireless Security

Security System:

Authentication Type:

WEP Data Encryption:

Key 1: ☒

Key 2: ☐

Key 3: ☐

Key 4: ☐

Passphrase:

Attention:

Two device must use different IP

Only one device can enable DHCP server.