



Q: Firmware is crashed, how to recover my AP?

A: Please refer the followings to upgrade firmware :

1. Unplug the power of device.
2. Hold the hardware reset button while plugging the power.  
After 15seconds, the Status LED will flash very fast and WLAN LED is off, please release the reset button
3. Set your PC's IP address to "Obtain an IP address automatically". Connect the device's LAN port to your PC.

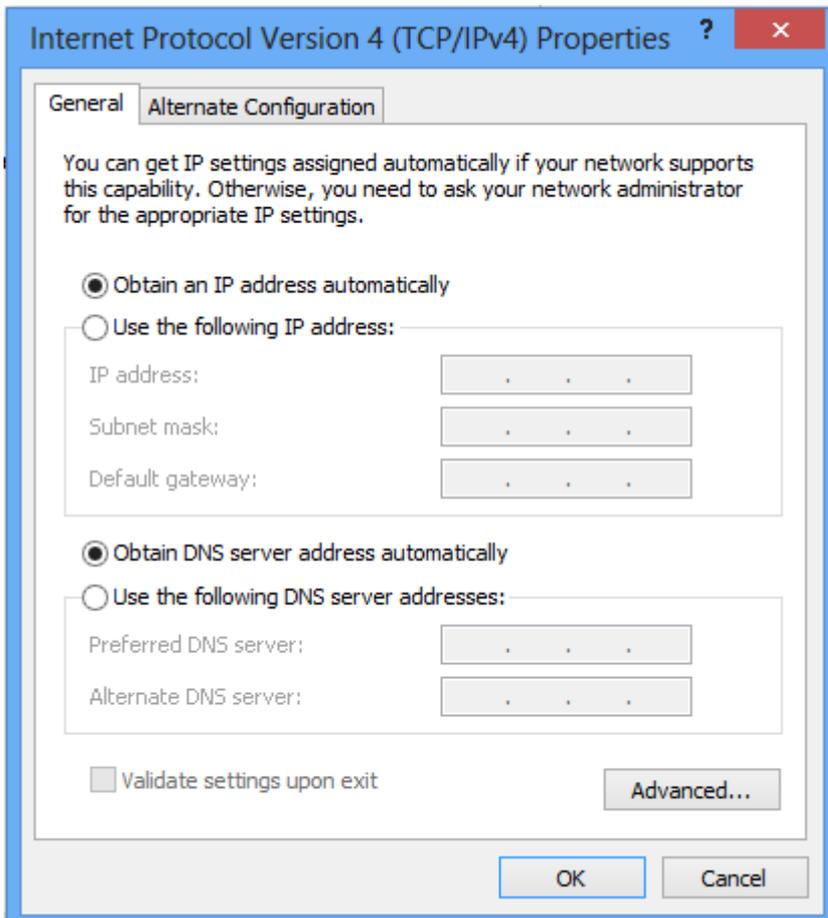


4. Open your IE browser, type "http://192.168.123.254". You will see the emergency function page.

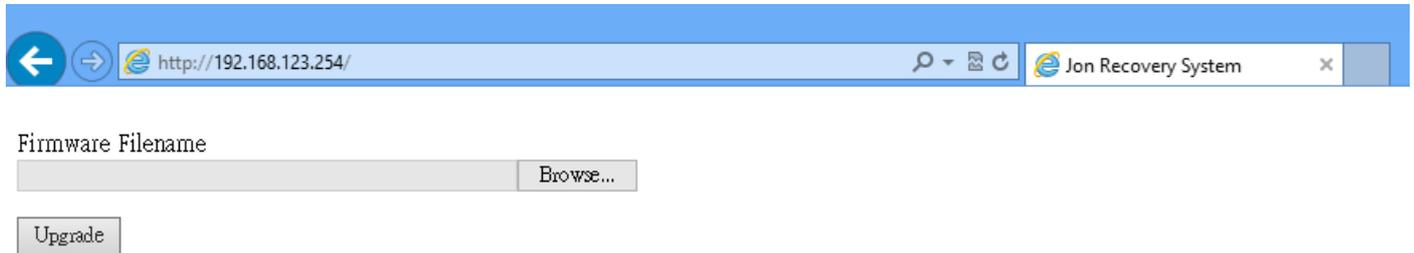

Please note that the emergency function only works with IE browser.

5. Click "Browse" button to select device's firmware, and click "Upgrade" button to upgrade firmware.

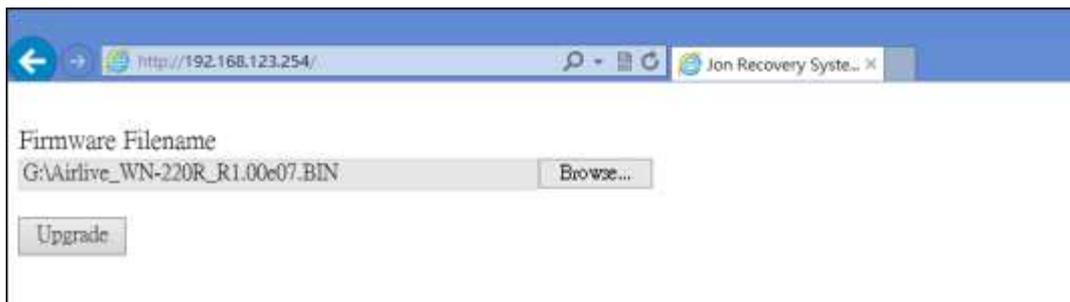

6. The procedure will take about three minutes. When the procedure finished, the WLAN LED is on.
7. Please unplug and re-plug the power of your device manually.
8. Please wait a while until it boots up (about 1 minute).  
Then press the hardware reset button over 10 seconds to restore it to factory default setting. After resetting, the device's IP is 192.168.1.254.
9. Your PC will get DHCP from device, so the IP of your PC will be 192.168.1.xxx.  
Open your web browser, and then type " http://192.168.1.254".  
You will get into the web management.