


Intranet: VoIP point to point connection

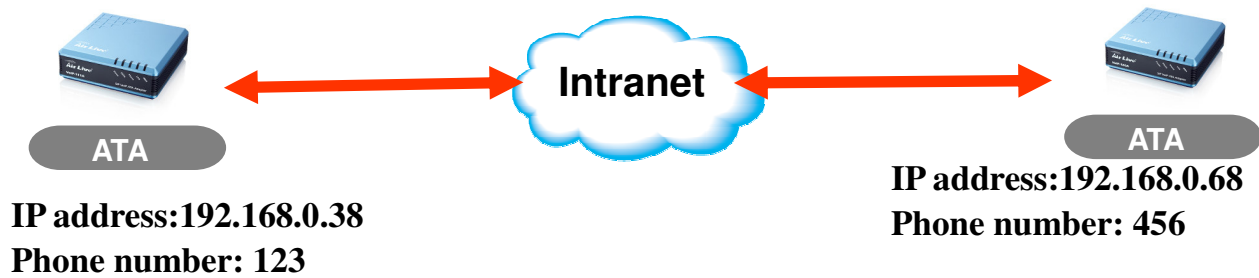

Site A

Step 1: add Phone book on IP direct call; remember to enter destination IP and phone number

Step 2: check the ATA phone number, don't activate the phone (for point to point only)

VoIP Web Management - Netscape Navigator

File Edit View History Bookmarks News Tools Help

http://192.168.0.38/login.cgi

Netcape.com Getting Started

VoIP Web Management

Phone Book

You could add/delete items in current phone book.

Phone Book Page: page 1

Phone	Name	URL	Select
0	1	123@192.168.0.68	<input type="checkbox"/>
1			<input type="checkbox"/>
2			<input type="checkbox"/>
3			<input type="checkbox"/>
4			<input type="checkbox"/>
5			<input type="checkbox"/>
6			<input type="checkbox"/>
7			<input type="checkbox"/>
8			<input type="checkbox"/>
9			<input type="checkbox"/>

Delete Selected Delete All Reset

Add New Phone

Position: (0~139)

Name:

URL:

Add Phone Reset

VoIP Web Management - Netscape Navigator

File Edit View History Bookmarks News Tools Help

http://192.168.0.38/login.cgi

Netcape.com Getting Started

VoIP Web Management

Service Domain Settings

You could set information of service domains in this page.

Phone No.: Phone 1

Realm 1 (Default)

Active: ☐ On ☒ Off

Display Name:

User Name: 123

Register Name:

Register Password:

Domain Server:

Proxy Server:

Outbound Proxy:


Subscribe for MWI: ☐ On ☒ Off

Status: Not Registered

Site B

Step 1: add Phone book on IP direct call; remember to enter destination IP and phone number

Step2: check the ATA phone number, don't active the phone (for point to point only)

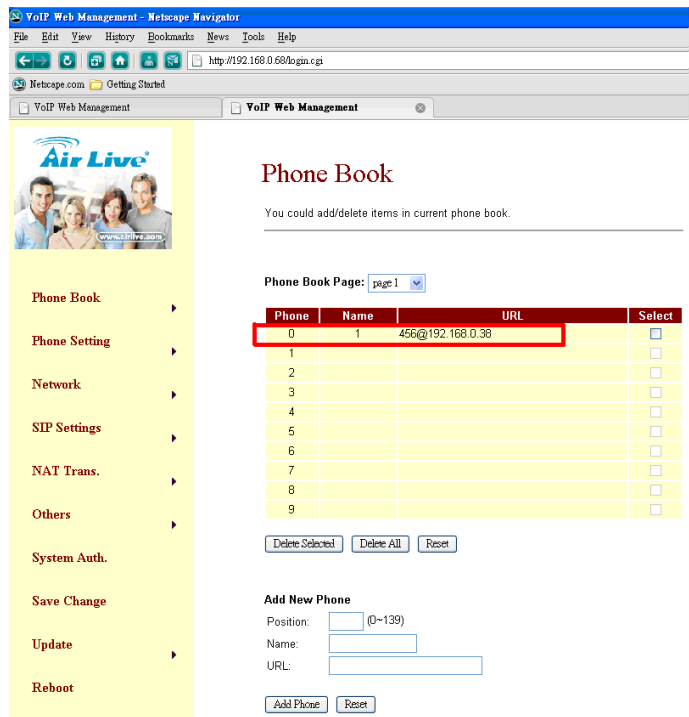


The screenshot shows the 'VoIP Web Management' interface in a Netscape Navigator browser. The page title is 'Phone Book'. Below the title, it says 'You could add/delete items in current phone book.' There is a 'Phone Book Page:' dropdown menu set to 'page 1'. A table with 4 columns (Phone, Name, URL, Select) is displayed. The first row is highlighted with a red border and contains the values: 0, 1, 456@192.168.0.38, and a checkbox. Below the table are buttons for 'Delete Selected', 'Delete All', and 'Reset'. On the left side, there is a sidebar with a list of menu items: Phone Book, Phone Setting, Network, SIP Settings, NAT Trans., Others, System Auth., Save Change, Update, and Reboot. The 'Phone Book' item is selected.

Phone	Name	URL	Select
0	1	456@192.168.0.38	<input type="checkbox"/>
1			<input type="checkbox"/>
2			<input type="checkbox"/>
3			<input type="checkbox"/>
4			<input type="checkbox"/>
5			<input type="checkbox"/>
6			<input type="checkbox"/>
7			<input type="checkbox"/>
8			<input type="checkbox"/>
9			<input type="checkbox"/>

Buttons: Delete Selected, Delete All, Reset

Add New Phone

Position: (0~139)
Name:
URL:
Buttons: Add Phone, Reset

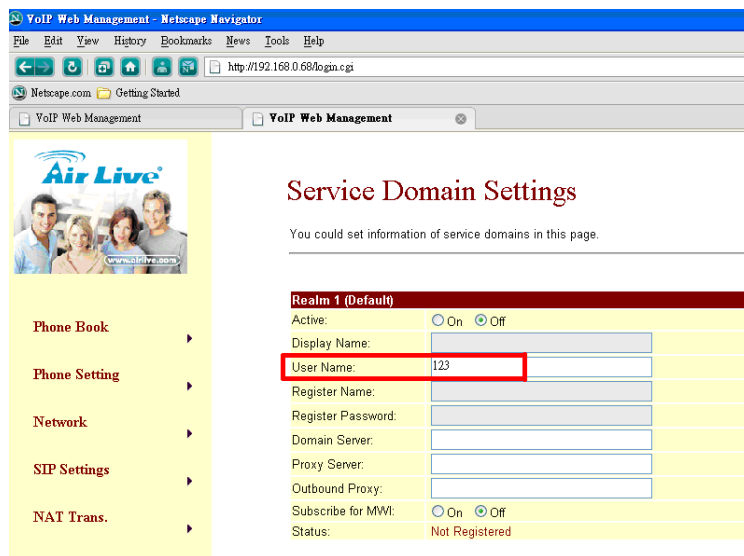

The screenshot shows the 'VoIP Web Management' interface in a Netscape Navigator browser. The page title is 'Service Domain Settings'. Below the title, it says 'You could set information of service domains in this page.' There is a section for 'Realm 1 (Default)' with various settings. The 'User Name' field is highlighted with a red border and contains the value '123'. Below the 'User Name' field are fields for 'Register Name', 'Register Password', 'Domain Server', 'Proxy Server', and 'Outbound Proxy'. At the bottom, there are radio buttons for 'Subscribe for MWI' (On/Off) and a 'Status' field showing 'Not Registered'. On the left side, there is a sidebar with a list of menu items: Phone Book, Phone Setting, Network, SIP Settings, NAT Trans., and others. The 'Phone Setting' item is selected.

Realm 1 (Default)

Active: ☐ On ☒ Off

Display Name:

User Name:

Register Name:

Register Password:

Domain Server:

Proxy Server:

Outbound Proxy:

Subscribe for MWI: ☐ On ☒ Off

Status: Not Registered

How to make calls

In Site A, just use the analog phone then press 1#, it will check the phone book name to dial out

In Site B, just use the analog phone then press 1#, it will check the phone book name to dial out